



AMULYA PLUS+

M
A
R
V
E
L

1 mm Thickness



COLLECTION
2019



AWAKEN YOUR SPACE
WITH VIBRANT AND
LIVELY SURFACES

AMULYA PLUS+

Purbanchal Laminates Pvt. Ltd.

CORPORATE OFFICE :

Goyal Avenue, Office No. 101 & 102, 1st Floor,
Plot No. 318, Ward 12-B, Opp. Old LIC Block,
Gandhidham - Kutch, Gujarat - 370201
Telefax : +91 2836 231486

WORKS :

Survey No. 340, Village: Bhimasar, Taluka: Anjar, Dist. - Kutch, Gujarat- 370 110.
Telefax: [02836] 285465 [M]: +91 98795 21735

AMULYA MICA GALLERY :

KOLKATA : 19, Kenderdine Lane, 1st Floor, Opp-Indian Airline Office
Near Yogayog Bhawan, Bow Bazar, Kolkata-12.
Phone - 80176 64995

LUDHIANA : B-XVII, 167/A, Bharat Nagar, Near PNB,
Ludhiana.
Phone - 97264 15722

BRANCH OFFICES:

Ahmedabad : +91 98240 21650
Bangalore : +91 97264 15667
Chandigarh : +91 97264 15721
Delhi : +91 97264 15761
Kolkata : +91 97264 15671
Ludhiana : +91 97264 15722
Mumbai : +91 97264 15712

DISTRIBUTORS :

Abohar, Ahmedabad, Alwar, Ambala, Amritsar, Aurangabad, Bangalore, Beawar, Bhatinda, Bhubaneswar, Chandigarh,
Chennai, Coimbatore, Delhi, Goa, Guwahati, Hamirpur, Hapur, Hubli, Hissar, Hyderabad, Indore, Jammu, Jaipur, Jalgaon,
Jodhpur, Kochi, Kolhapur, Kolkata, Ludhiana, Lucknow, Mangalore, Mumbai, Nagpur, Nashik, Patna, Pune, Raipur, Rajkot,
Ranchi, Silliguri, Srinagar, Surat, Sri Ganganagar, Tinsukia, Udaipur, Vadodra, Vijaywada, Vishakhapatnam.

TOLLFREE NUMBER: 1800-233-1468



FOR MORE DETAILS, VISIT :
www.amulyamica.com

Scratch Resistant
LAMINATE



BREAK THE NORMS

With inventively featured materials, create a charming and mesmerizing aura of supreme form.

NORMS



AMULYA PLUS+

Amulya Plus+ is made from specially formulated resins, selective décor & kraft paper and very high glossy press plates. They are effectively resistant to scuff marks & scratches, with amazing aesthetics. They are suitable for various applications such as kitchen, lounge, restaurant, mall, spa, reception, counters and many other areas where the décor surface of the laminate is invariably exposed to regular and continuous friction. The company has recently developed with breakthrough technology and extensive research, a suitable solution of extreme authenticity i.e. Amulya Plus+. The new range of Amulya Plus+ laminates in MATT finish, first of its kind in India, provides a better option for protecting your dream creations from scuff marks and scratches effectively. It is durable, along with having the ability to withstand high temperatures as surface of Amulya Plus+ laminates is smooth and easy to clean. It looks stunningly beautiful for years.

Product Description -

Introducing our latest offering Amulya Plus+, the scratch resistant laminates. Amulya Plus+ is exclusively manufactured using the advanced anti scratch technology. This makes Amulya Plus+ highly resistant to scuffs and abrasions, which allows you to use it in a number of different places without worrying too much about damaging the decorative surface.

Why Amulya Plus+?

Amulya Plus+ is made from high quality resins which pass through stringent quality control checks. Amulya Plus+ gives you high resistance to scuffs and abrasions. Scuff and abrasion occur during regular usage in areas like kitchen etc. The normal high gloss laminates tend to give faded appearance over a certain period of time. Amulya Plus+ has a higher scuff and scratch resistance, which maintains the high gloss appearance for a longer period.

Advantages -

- **Gloss Level:** The Gloss meter reading of Amulya Plus+ High Gloss Laminate is over 110 when tested at 60° angle whereas other ordinary gloss laminates have 80 gloss meter reading when tested at 60° angle.
- **Scratch Resistant:** Amulya Plus+ shows 2 to 3 times better resistance to abrasions and scratches than other high gloss laminates.
- **MAR Resistance:** Amulya Plus+ MAR resistance is exceptionally good. Amulya Plus+ retains the gloss level three times longer than its ordinary counterparts.
- **Stain & Impact Resistant:** Range of Amulya Plus+ high gloss laminates is manufactured with exceptional quality raw materials. This makes Amulya Plus+ highly resistant to surface staining and protects it from damages due to heavy impacts.

Colors:	35
Size:	2440mm x 1220mm
Finishes:	High Gloss and Matt
Thickness:	1.00mm



Amulya Plus



1502 AP | TOMATO RED


Normal Gloss



1502 HGF | TOMATO RED



TRY IT... BELIEVE IT...

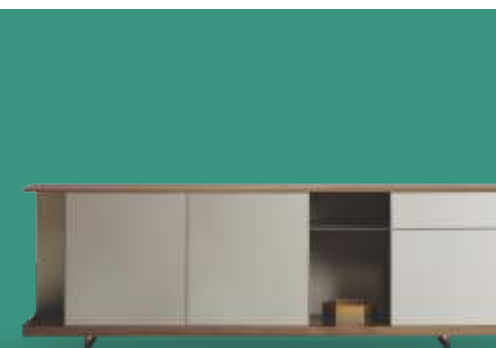

Suitable Applications Areas:

- Kitchen
- Children's Room
- Restaurant
- Bar
- Dining Room
- Reception
- Conference Room



>>>>> MATT



3225 APM | ORIENTAL BLACK



3224 APM | TORANO




1706A APM | BURGUNDY



1327 APM | BEIGE



3047 APM | ARGENTINE CAPISCO - III



1002 APM | OFF WHITE



1502 APM | TOMATO RED



1324 APM | CRUNCH



1551 APM | HOT POPPY



Used Laminate: 1327 APM

AMULYA PLUS+



Used Laminate: 3047 APM




VIBRANT & VIVACIOUS FORM

The range speaks a fervor of upmarket trends creating style status of its own.





GLOSSY

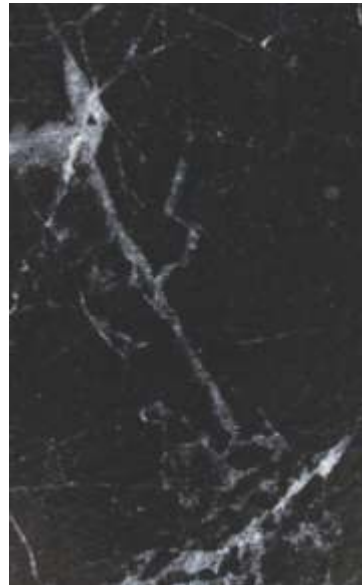


3225 AP | ORIENTAL BLACK



3224 AP | TORANO



Used Laminate: 3224 AP

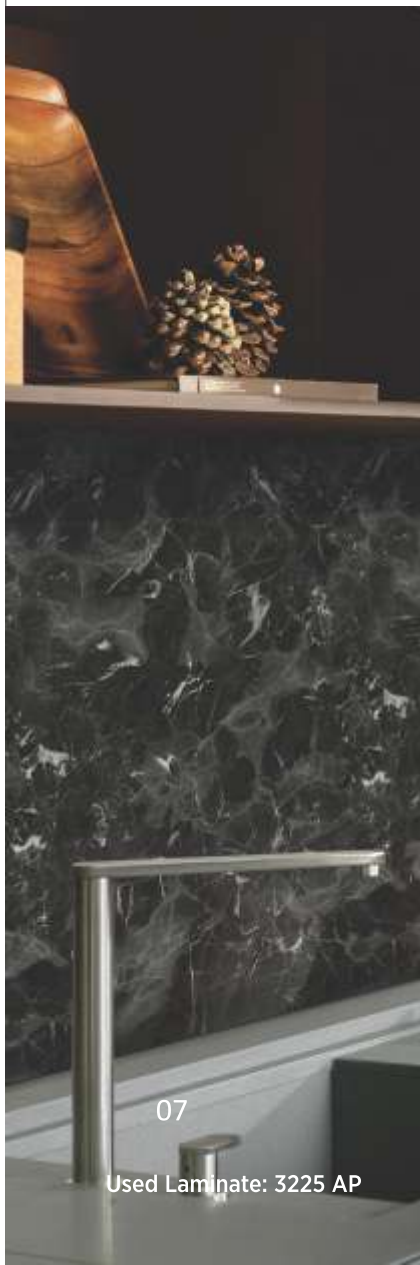

07
Used Laminate: 3225 AP



2176 AP | CORAL WALNUT



AMULYA PLUS+



2143 AP | BROWN SQUALL



3011 AP | HIGHLAND PINE



2148 AP | ALCAZAR NOCE



3120 AP | IMPERIAL WALNUT SEPIA



3119 AP | IMPERIAL WALNUT FROSTY




WINSOME WOOD ACCENTS

The elegant quotient of vociferous vein, get smart with the woody terrain.

>>>> GLOSSY




Used Laminate: 1002 AP




1001 AP | SNOW WHITE



1004 AP | FROSTY WHITE



1002 AP | OFF WHITE



1203 AP | ALLERGY GREY




1327 AP | BEIGE

>>>>


LIVELINESS
FOR YOUR
SPACE

Refreshing and underlining air of positive spirit and energy, live it up full on.

AMULYA
PLUS+



1009 AP | MARIGOLD



1005 AP | LIME



1406 AP | PARROT GREEN



1603 AP | BANANA YELLOW



1621 AP | FANTA ORANGE



>>>>> GLOSSY

Glitzy glamor builds on and scintillates your senses all along.



Used Laminate: 1401 AP



1006 AP | FIESTA ROSE




1502 AP | TOMATO RED



1401 AP | ELECTRIC BLUE

AMULYA PLUS+


>>>>> CREATING COZY COMFORT



1552A AP | BARBIE PINK



1008 AP | BERRY BUNCH




1706A AP | BURGUNDY



1007 AP | SHANGRILA



1324 AP | CRUNCH

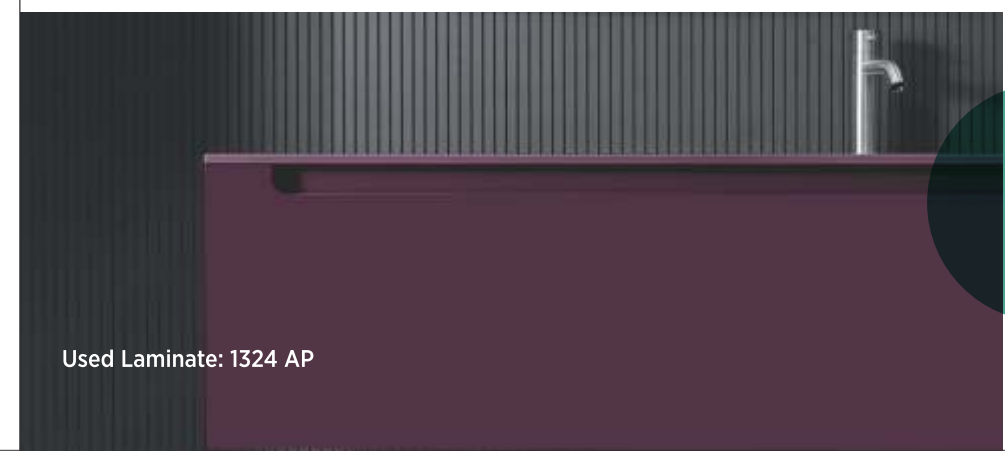

Used Laminate: 1324 AP



>>>>

INTEGRATING GRACEFUL AMBIENCE

Adhering to great standards,
testing is meticulous and is also
efficiently maintained.



Fabrication:

It is important that before using high pressure laminates, they should be carefully conditioned to the ambient conditions of the application area. Usually, the laminates and the substrate require at least 48 hours to properly adapt to the surroundings. It is recommended that sufficient air circulation is provided around the laminate and its components. For conditioning, the recommended relative humidity is 45% to 55% at approximately 24°C.

Care & Maintenance:

Storage: We recommend storing Amulya Plus+ in a horizontal position with the uppermost sheet laid face down. Further, add a thick board on the top to protect the sheets from getting damaged and warped. Always rotate the stored laminate sheets, so the older sheets are used first. Store the laminate stock away from moisture, and ensure the sheets are not in contact with the floor or outside wall. Do not slide the laminate sheets; lift the sheets vertically while moving them. We highly recommend using 2 individuals to carry the sheet to ensure the decorative surface doesn't get damaged. The protective film should be removed only after the application process is complete.

Cleaning: Always clean the surface with a soft, clean and slightly damp cloth. We do not recommend using brushes or scourers on the laminate surface.


Maintenance:

- **Scratches:** Sharp pads, abrasive cleaners or powders can damage the laminate surface and make it prone to staining.
- **Harsh Chemicals:** Contact with harsh chemicals like abrasive cleaners, acids can etch or discolor the surface badly. These surfaces are not meant for constant contact with such chemicals. If these chemicals are spilled on the decorative surface, immediately wipe the surface clean, rinse thoroughly and wipe with a clean & dry cloth.
- **Hot Articles:** High pressure laminates are highly heat resistant, but we do not recommend exposing the surface to temperatures above 135°C. Ensure that hot pans and dishes are never placed on the laminate surface straight from the oven or the cooktop. To shield the surface from hot appliances, we would suggest using trivets or insulating pads. Continuous exposure to temperatures higher than 65°C may cause the laminate to separate from the substrate.


Limited Warranty:

Keep laminate sheet away from direct sunlight, as it is meant for indoor application. Please check the sheet prior to application, in case of any claims, the liability of the Company is however limited to the cost of the product only, which is manufactured by Amulya Mica.




भारत सरकार
Government of India
राष्ट्रीय परीक्षण शाला (पूर्वी क्षेत्र)
National Test House (Eastern Region)
 11/1 जज्जेस कोर्ट रोड, अलीपुर, कोलकाता - 700 027
 11/1, Judges' Court Road, Allipore, Kolkata - 700 027
परीक्षण प्रमाण पत्र

FORM NO : NTH/ALP/F/5



TEST CERTIFICATE INTERIM/FINAL REPORT

परीक्षण प्रमाण पत्र सं. Test Certificate No NTH(ER)/CH(H)/2018/0051	जारी होने की तिथि Date of Issue 01/01/2019	कोड नं Code No 1543391128575	पृष्ठ Page 1	पृष्ठों की संख्या No of Pages 2
---	--	------------------------------------	--------------------	---------------------------------------

जिसे जारी करना है
Issued To : **PURBANCHAL LAMINATES PVT. LTD.**

पता
Address : **101-102,1st Floor, Goyal Avenue, Plot No. 318, Ward 12/B, Opp. LIC Block, Gandhidham, Kutch, Gujarat 370201**

प्राहक का सन्दर्भ सं एवं दिनांक
Customer's Ref. No. : **NIL** Date: **26/11/2018**

पंजिका सं एवं दिनांक
Register No & Date : **0051/NTH(ER)/CH(H)/29/11/2018**

परीक्षण सामग्री का विवरण
Description of Test Item : **HPL Decorative Laminate testing for Mar Resistance.**

परीक्षण सामग्री का पहचान
Identification of Test Item : **6 Nos. of high gloss laminates received in a white envelope packed and sealed with thermocol and tape. Describes as HPL Decorative laminate, finish: High Gloss, Pattern No.:1001,Grage: AP+, Thickness:1.00mm,Size: 4inch*4inch**




नमूना का विशिष्टि (यदि हो)
Product Specification (If any) : **ASTM D6037**


नमूना प्राप्ति की तिथि
Date of Receipt of the Test Item : **28/11/2018**

कार्य सम्पादन की तिथि
Date(s) of Performance of Tests : **From: 10/12/2018 To: 28/12/2018**


व्यावहृत प्रणाली का पहचान
Method(s) used for Test : **On the lines of ASTM D6037**

नमूना प्रक्रिया वहाँ प्रासंगिक हों
Sampling Procedure where relevant : **NA**

Tested By  Sona Ram Baskey SA(Chemical)	Checked By  Susanta Kumar Ratha SO (Chemical)	Approved By  Dr. Anath Bandhu Mondal Scientist- B (Chemical)
--	--	---


भारत सरकार
Government of India
राष्ट्रीय परीक्षण शाला (पूर्वी क्षेत्र)
National Test House (Eastern Region)
 11/1 जज्जेस कोर्ट रोड, अलीपुर, कोलकाता - 700 027
 11/1, Judges' Court Road, Allipore, Kolkata - 700 027
परीक्षण प्रमाण पत्र

FORM NO : NTH/ALP/F/5






TEST CERTIFICATE INTERIM/FINAL REPORT

परीक्षण प्रमाण पत्र सं. Test Certificate No NTH(ER)/CH(H)/2018/0051	जारी होने की तिथि Date of Issue 01/01/2019	कोड नं Code No 1543391128575	पृष्ठ Page 2	पृष्ठों की संख्या No of Pages 2
---	--	------------------------------------	--------------------	---------------------------------------

Sl. No.	Test Name	Test Result	Limit
1	Mar Resistance as per ASTM D 6037-96	Gloss Retention:95.77%	-

टिप्पणी
Note : **NIL**

टिप्पणी
Remarks : **NIL**

Tested By  Sona Ram Baskey SA(Chemical)	Checked By  Susanta Kumar Ratha SO (Chemical)	Approved By  Dr. Anath Bandhu Mondal Scientist- B (Chemical)
--	--	---

