

195x1200mm GLAZED VITRIFIED TILES







when,

Ceramic blends with innovation, innovation in ceramic happens. We have specialisation in manufacturing high-quality VITRIFIED and WALL TILES for every possible Architectural, Residential and Commercial use.

Colortile is one of the leading manufacturers of GVT and Ceramic Body Tiles in India. For over a decade now, Colortile has been innovating and manufacturing Floor and Wall Tiles with an aim to excel in the tile field and also to satisfy its ever-increasing client base.

We have installed a production capacity of over 22 million square meters per annum, spread over 3 manufacturing units at Morbi, Gujarat, India. Our factories are well-equipped with state-of-the-art technology and modernised laboratories to keep us ahead of the curve.

Mission

We manufacture wall and floor tiles that rank high on quality and aesthetic value irrespective of the place where they are applied. We are the first choice of residential, commercial and public buildings for indoor and outdoor applications. We forge a long-term partnership with all our clients by providing them excellent service. We keep our ears close to the ground to satisfy the needs of an evolving market.

Vision

Always putting the bar high and the dream to achieve them with all the dynamism in designs, we have invested in the latest technology to make COLORTILE a top-notch brand in the tile world. We, at COLORTILE family promise ourselves to grow, innovate and maintain the quality forever.

Inspiration



Myriad of products with stunning finishes that leads to amazing creativity and enhances the living .



GLAZED VITRIFIED TILES



Innovation

Inspired by the beauty of natural wood across the globe.

The Indian consumer is becoming more and more design & unique collection of wooden textured Glazed Vitrified Tiles to décor conscious, day by day. Today a home is beyond a fulfill the ever increasing needs and expectations of Indian necessity, it is also a reflection of one's status, personality & consumers. COLORTILE's innovative range of Glazed Vitrified taste. Hence, the demand for premium quality vitrified tiles Tiles has an extensive array of exclusive collection in the with innovative designs and perfect craftsmanship has 195x1200mm size & it is available PAN India, through wide increased by leaps and bounds. COLORTILE presents a distribution network.

GLAZED **VITRIFIED TILES**

195x1200mm


M Use for

Use for Wall

4mm Spacer Recommended

Floor

Application Areas

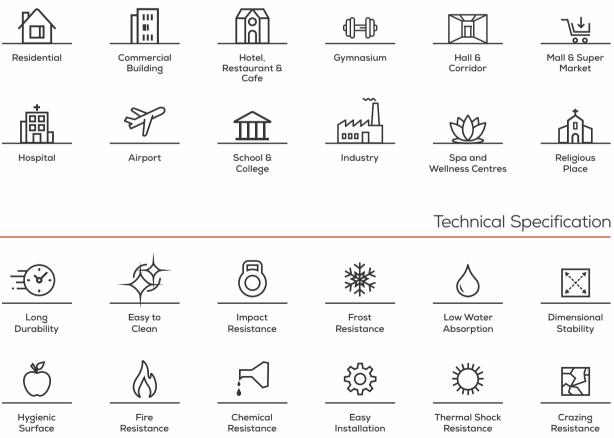

(h)

Religious Place



Dimensional Stability



Crazing Resistance



GLAZED VITRIFIED TILES

195x1200mm

With the classic touch of wood, Woodera is designed to decorate your space with elegance. The tiles from this series, with its perfect and innovative designs, make your space look lucid. These wood tiles are as firm as the roots of the tree. It gives you the feel of wilderness at home.

> Let wilderness enhance your space diligently

Size





Vintage Crema

195x 1200mm

Finish

- RUSTIC CARVING



6 - R

17



FLOOR : Vintage Crema | Size - 195x1200mm | Finish - Rustic Carving









Vintage Camel

6 - R

Finish

- RUSTIC CARVING





FLOOR : Vintage Camel | Size - 195x1200mm | Finish - Rustic Carving









Wonder Tree Bark

Wonder Tree Bark Decor

195x 1200mm

Finish

- RUSTIC CARVING - RUSTIC MATT

12 - R

6 - R



WALL : Wonder Tree Bark Decor | Size - 195x1200mm | Finish - Rustic Carving

FLOOR : Wonder Tree Bark | Size - 195x1200mm | Finish - Rustic Matt











- RUSTIC CARVING - SPREAD SPARKLE



Vibes Camel



3 - R



FLOOR : Vibes Camel | Size - 195x1200mm | Finish - Spread Sparkle Vibes Camel Decor | Size - 195x1200mm | Finish - Rustic Carving









Vibes Ochre

Vibes Ochre Decor

195x 1200mm

Finish

- RUSTIC CARVING - SPREAD SPARKLE

3 - R

9 - R





FLOOR : Vibes Ochre | Size - 195x1200mm | Finish - Spread Sparkle Vibes Ochre Decor | Size - 195x1200mm | Finish - Rustic Carving









- RUSTIC CARVING - SPREAD SPARKLE





3 - R



WALL : Vibes Brown & Decor | Size - 195x1200mm | Finish - Rustic Carving, Spread Sparkle

FLOOR : Vibes Brown | Size - 195x1200mm | Finish - Spread Sparkle











- RUSTIC CARVING - SPREAD SPARKLE







6 - R



FLOOR : Historic Pearl | Size - 195x1200mm | Finish - Spread Sparkle Historic Camel Decor | Size - 195x1200mm | Finish - Rustic Carving



Size





195x 1200mm

Finish

- RUSTIC CARVING - SPREAD SPARKLE



Historic Verde Decor



6 - R

FLOOR : Historic Wash Grey | Size - 195x1200mm | Finish - Spread Sparkle Historic Verde Decor | Size - 195x1200mm | Finish - Rustic Carving











- RELIEF MATT

Monte Moka



6 - R



FLOOR : Monte Natural | Size - 195x1200mm | Finish - Relief Matt



Size





Pinewood Ochre

195x 1200mm

Finish





9 - R



FLOOR : Pinewood Ochre | Size - 195x1200mm | Finish - Rustic Matt









Veneer Camel

9 - R

Finish

- RUSTIC MATT



WALL : Venner Camel | Size - 195x1200mm | Finish - Rustic Matt





Colortile Quality Standards Standards according to ISO 13006: Annex G - EN 14411: Annex G. Dry - Pressed Ceramic Tiles. Group Bla (Eb ≤ 0.5%)

Technical Factory	Test	Requirements		Colortile Values	
Technical Feature	Method	%	mm	%	mm
A. Dimensions and Surface Qualit	у				
Length and Width		± 0.6%	± 2.0	± 0.20%	± 1.0
Thickness		± 5.0%	± 0.5	± 5.00%	± 0.5
Straightness of Sides		± 0.5%	± 1.5	± 0.20%	± 1.0
Rectangularity		± 0.5%	± 2.0	± 0.20%	± 1.2
Surface Flatness a) Centre curvature b) Edge curvature c) Warpage	UNI EN ISO 10545-2	± 0.5% ± 0.5% ± 0.5%	± 2.0 ± 2.0 ± 2.0	± 0.20% ± 0.20% ± 0.20%	± 1.0 ± 1.0 ± 1.0
Surface Quality		A minimum of 95% of the tiles shall be free from visible defects that would impair the appearance of a major area of tiles.		Compliant	
3. Physical Properties					
Water Absorption	UNI EN ISO 10545-3	Eb ≤ 0.5% Individual maximum : 0.6% (absorbed water mass)		Eb ≤ 0.1% (absorbed water mass)	
Breaking Strength		UNI EN ISO 10545-4 Average minimum 35 N/mm² Individual minimum 32 N/mm²		≥ 1700 N	
Modulus of Rupture				≥ 37 N/mm²	
Frost Resistance	UNI EN ISO 10545-12	Required		Compliant	
Coefficient of Linear Thermal Expansion From Ambient Temperature to 100°c	UNI EN ISO 10545-8	Required		6 x 10 ⁻⁶ K ⁻¹ max	
Scratch Hardness (Mohs scale)	EN 101	Declared by the producer		3 to 6 Depends on Finish & Color	
Crazing Resistance	UNI EN ISO 10545-11	Declared by the producer		4 Cycle Pass	
C. Chemical Properties					
Resistance to Staining	UNI EN ISO 10545-14	Minimum Class 3		5	
Resistance to Household Chemicals and Swimming Pool Salts		Minimum GB		GA	
Resistance to Low Concentrations of Acids and Alkalis	UNI EN ISO 10545-13	To be reported		GLA	
Resistance to High Concentrations of Acids and Alkalis		To be reported		GHA	

Note: Colours shown are as accurate as the limitations of the printing results on paper are possible. Prospective customers are advised to inspect a sample of the tile before placing the order. Every effort has been taken to ensure the accuracy of the information given. However, the company reserves its right to change/alter the specifications without any prior notice. Sometime shade variation or size variation may occur, as this is inherent property of ceramic tile industry. Before fixing the tiles, all are advised to follow the laying instructions printed on the corrugated box of the tile. Company does not take/carry any responsibility of what so ever nature, once tiles are laid.

Packing Details

Size	Thickness	pcs / Box	m² / Box	kg / Box
195x1200mm	9.0mm (Approx.)	6 pcs	1.40 Sq.mtr	26.70 kg (Approx.)





Color Granito Pvt. Ltd.

At. Ratavirda Village, Sartanpar Road, Tal. Wankaner - 363 621, Dist. Morbi, Gujarat, INDIA

Cell: +91 95120 08815

info@colortile.in | www.colortile.in

