





APPLICATION

Available in Size

2440mm X 1220mm (8ft X 4ft)

Thickness: 1.3-1.5mm (+/- 10%) same as sample use in brochure



Kitchen



Furniture



Bathroom



Commercial



Healthcare



Restaurants

FEATURES



Treated with a special lacquer coating on the surface, our 6th anti scratch acrylic laminates can bear daily wear & tear.



Anti-Yellow UV Resistance



Anti-bacterial and Anti-fungal.



Our laminate are specially treated to ensure they remain termite and borer free for several years.



Lots of Range and Huge



Low porosity low water absorption.



For ease of use and Effortless installation, our Range of laminates have been developed in A way to keep them extremely light weight.



Our Anti Scratch Acrylic Laminates are Extremely study and Durable. The can with stand heavyloads easily.



100% Pure Acrylic Sheet





INDEX

DESIGN NO.	PAGE NO.	COLOUR									
GA-4129 😋	02		GA-4018	16		GA-4411 😋	28		GA-4805 O	42	11
GA-4030	02		GA-4016	18		GA-4414 😋	28		GA-4806 O	42	inh® 1
GA-4111 😋	04		GA-4039	18		GA-4425 🔾	30		GA-4811 00	44	11/16
GA-4011	04		GA-4031	18		GA-4407 🔾	30		GA-4814 💠	44	1 13
GA-4128 😋	06		GA-4032	18		GA-4421 🗘	30		GA-4812 👓	46	
GA-4028	06		GA-4040	18		GA-4419 💠	30		GA-4813 👥	46	
GA-4143 😋	08		GA-4036	20		GA-4404 📀	30		GA-4605 O	48	
GA-4013	08		GA-4033	20		GA-4403 O	30		GA-4606 O	48	
GA-4112 😋	10		GA-4034	20		GA-4412 💠	32		GA-4601 😂	50	有种 其
GA-4001	12		GA-4009	20		GA-4408 📀	32		GA-4602 🗘	50	
GA-4002	12		GA-4037	22		GA-4410 💠	32		GA-4607 🔾	52	
GA-4027	12		GA-4038	22		GA-4409 O	34		GA-4603 O	52	111111
GA-4004	12		GA-4003	22		GA-4423 📀	34		GA-4608 O	54	1362
GA-4020	12		GA-4005	24		GA-4422 📀	34		GA-4609 O	56	
GA-4023	14		GA-4006	24		GA-4418 🗘	36		GA-4610 🗘	56	
GA-4014	14		GA-4022	24		GA-4420 🗘	36		GA-01 🗘	58	
GA-4010	14		GA-4026	24		GA-4424 🗘	36		GA-02 🗘	58	
GA-4007	14		GA-4019	26		GA-4807 🗘	38		GA-03 🗘	58	
GA-4012	14		GA-4035	26		GA-4808 O	38		GA-04 🗘	58	
GA-4008	16		GA-4415 🔾	28		GA-4801 🔾	40				
GA-4029	16		GA-4417 😯	28		GA-4803 🔾	40	1			

In recent time, fake products have created a serious problem across the country. Always buy original **GENOA** products. Before buying, please check **GENOA** sticker & ensure whether you have bought original **GENOA** Products. In case if you have any doubt,



6H ANTI - SCRATCH SGS CERTIFICATE











FOR ASSURED GENUINE PRODUCT













6 H G R A D E

Stripe

UB

neet Size : 1220mm x 2440mm (4ft x 8 ft)

GA-4028

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

GA-4128 😋












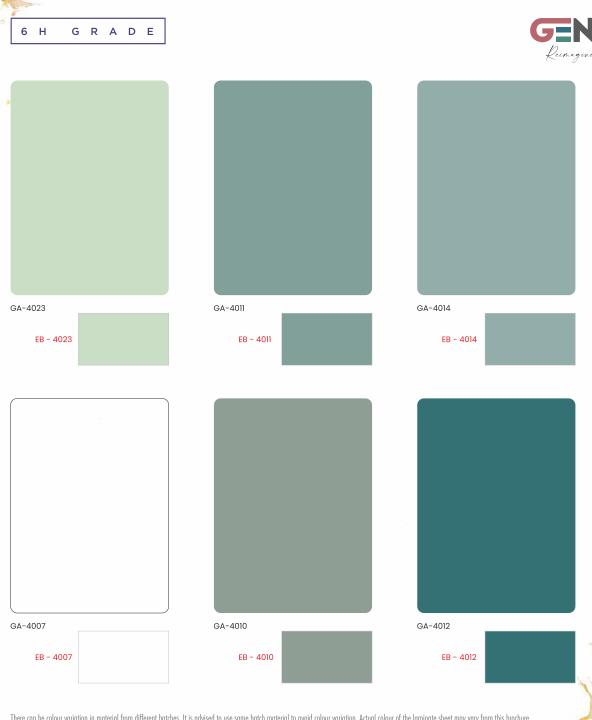











6 H G R A D E












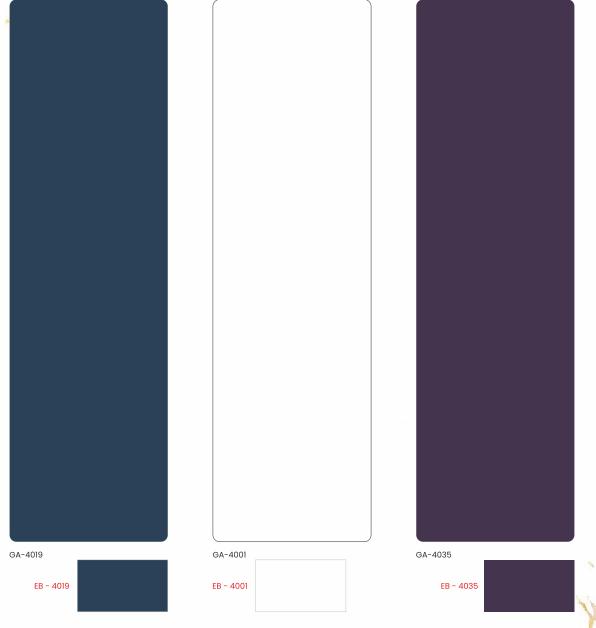











6 H G R A D E







GA-4412 🗘

GA-4408 🗘

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.



6 H G R A D E





GA-4409 🗘



GA-4423 🗘



GA-4422 🗘



neet Size : 1220mm x 2440mm (4ft x 8

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.



GENON Leinagine Luxury 6 H G R A D E GA-4420 😋 GA-4424 🗘 GA-4418 🗘 There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.











GA-4808 🗘















GA-4803 🗘

















GA-4806 🗘



















GA-4814 🔾 🔾





















GA-4813 😋













Wooden





GA-4606 🗘











Wooden







GA-4602 🗘





















GA-4603 🗘












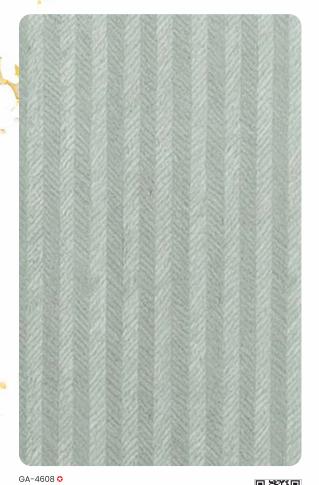















GA-4610 🗘



Scan **QR Code** For Full Sheet View



self adhesive scralch resislance









GA-4702 🗘






GA-4703 🗘



GA-4704 🗘

TIN/GUNMETAL



- \bullet Surface of Plywood /MDF must be dust free to use self adhesive mirror Acrylic sheet.
- For self adhesive glue to work, apply the laminate on a rough surface

ROSE GOLD

• Do not use mirror finish sheets for application in big sizes

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.



To avoid the formation of air bubbles when using a laminate sheet to decorate plywood, follow these steps:

- 1. Prepare the Surface: Ensure that the plywood surface is clean, dry, and free from any dust or debris. Sand down any irregularities or rough spots to create a smooth surface
- 2. Measure and Cut the Laminate Sheet: Measure the dimensions of the plywood and cut the laminate sheet slightly larger than the size of the plywood.

 This extra allowance will allow you to trim the edges later.
- 3. Apply Adhesive: Use 'GENBond' adhesive. Apply an, even layer of adhesive to the plywood surface using a paint roller or brush, following the
- 4. Position the Laminate Sheet: Carefully place the laminate sheet onto the plywood, aligning it properly. Start by positioning one edge and gradually press down the rest of the sheet, smoothing it out as you go. Use a laminate roller or a clean, smooth cloth to remove any air bubbles by pressing firmly from the
- 5. Apply Pressure and Allow Curing Time: After trimming, apply pressure on the laminate sheet using clamps/Abro Tape or heavy objects placed evenly across the surface. Maintain this pressure for at least 48 hours to allow the adhesive to fully cure and create a strong bond between the laminate and the plywood.
- 6. Trim the Edges: Once the laminate sheet is in place and free from air bubbles, allow the adhesive to dry according to the manufacturer's instructions.

 Then, use a laminate trimmer or a sharp utility knife to carefully trim the excess laminate from the edges of the plywood, following the shape of the plywood.
- 7. Apply Edge Banding (Optional): If desired, apply edge banding to cover the exposed edges of the plywood. Use a laminate trimmer or a sharp utility knife to cut the edge banding to size and adhere it using an appropriate adhesive.

By following these steps, using the recommended 'GENBond' adhesive, applying pressure, and allowing for sufficient curing time, you can minimize air bubble formation and achieve a smooth, professional-looking laminate finish on your plywood.

Please note: Genoa Acrylic laminates do not take any responsibility for air bubble formation during the application process.

Formation of Air Bubbles is strictly an application issue and beyond the scope of manufacturing faults.





do & dont's

- 1. Store the laminate in a cool and dry place.
- 2. Do not use Fast acting glue like HEATX on acrylic laminates as they can cause color changes.
- 3. Do not use hard reactive cleaners like alcohol, solvent, acetone, petrol, pinewood, or oil. These will damage the surface of the acrylic.
- 4. please use a soft microfiber cloth for cleaning.
- 5. Do not place HOT items near the surface of the Acrylic. As the sheet is flammable and can easily melt. Acrylic laminates are not Fire-resistant. DO NOT KEEP ACRYLIC IN ROLL FORM AT THE SITE. CRACKS WILL EMERGE WHEN ACRYLIC LAMINATES ARE KEPT IN ROLL FORM FOR OVER 24 HOURS. PLEASE CHECK THE SHEETS RIGHT AFTER RECEIVING AND OPEN THE ROLL. GENOA DOES NOT ACCEPT RETURNS FOR CRACKING OF ACRYLIC LAMINATES AFTER 24 HOURS OF DELIVERY


There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colour of the Acrylic sheet may vary from this brochure.



Technical Specifications.

Parameters	GENOA Acrylic Laminate	High Gloss Laminate Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

PANEL STRUCTURE













LIMITED WARRANTY:

Genoa products are reasonably free of defects and when properly handled and fabricated will comply, within reasonable deviations to applicable manufacturing specifications. Clients are advised to inspect product thoroughly prior to installation. Genoa warranty will not cover defects and non-compliance from otherwise attributable to any other causes, including without limitation:

- Improper handling / transportation / storage of the products Improper installation and unintended usage of the products Lack of / or improper maintenance of the products Exposure of the products to extreme temperatures Unauthorized alteration to the products Outdoor applications.
- No guarantee and no exchange in any circumstances There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations Actual colour of the acrylic sheet may vary from this brochure.

