



GENOA™

Reimagine Luxury

1.5MM ANTI SCRATCH ACRYLIC SHEETS



6H
ANTISCRATCH
EXTRA TOUGH

COLLECTION
2022



COMPANY PROFILE

GENOA SALES LLP is a leading business house with multifaceted activities like manufacturing, marketing and distribution of new age building materials. Leveraging 30 years of experience in the building industry, we enhance the quality of our clients' interior and exterior decoration needs. We take pride in serving our customers by bringing innovative design and art to this world. Our group of companies has diversified into the following products:

- Imported and domestic natural decorative veneer products.
- Acrylic Resin, Cement Wall, Decorative MDF, Solid Surface, Mosaic Highlighter, Charcoal Panels and Alabaster Sheets.
- PVC and Acrylic Laminates
- Plywood, Hardware and more interior products.

At **GENOA SALES LLP**. We are excited to bring you our exquisite collection of High Gloss Acrylic Laminates under our new GENOA collection and 100% PVC core under d-BOX collection.

FEATURES



1.5MM
THICKNESS

For exceptional solidity, our 6H Anti Scratch Acrylic Laminates are available in 1.5mm uniform thickness.



TERMITE &
BORER FREE

Our laminates are specially treated to ensure they remain termite and borer free for several years.



DURABILITY
& STRENGTH

Our Anti Scratch Acrylic Laminates are extremely sturdy and durable. they can withstand heavy loads easily.



LIGHT WEIGHT

For ease of use and effortless installation, our range of laminates have been developed in a way to keep them extremely light weight.



WATER &
STAIN PROOF

Treated with a special coating on the surface, our 6H Anti Scratch Acrylic Laminates are Water Proof as well as stain resistant.

APPLICATIONS

COLLECTION

Available in Size : **2440mm x 1220mm (8 Feet x 4 Feet)**

Thickness : **1.3mm ~ 1.5mm**

(± 10%)

● Kitchen

Worktops • Tables • Doors
Shelves • Cabinets • Trolleys



● Bathroom

Worktops • Shelves • Cabinets



● Furniture



● Healthcare

Wall Lining and Horizontal Surfaces
Lockers • Cabinets • Trolleys



● Commercial



● Hospitality & Restaurant Tables

Counter Tops • Doors • Cubicles • Lockers • Cabinets



● Wall Cladding & Partiton






6H ANTI - SCRATCH SGS CERTIFICATE



In recent time, fake products have created a serious problem across the country. Always buy original **GENOA** products. Before buying, please check **GENOA** sticker & ensure whether you have bought original **GENOA** Products. In case if you have any doubt, Please email us on info@genoalam.com

FOR ASSURED GENUINE PRODUCT

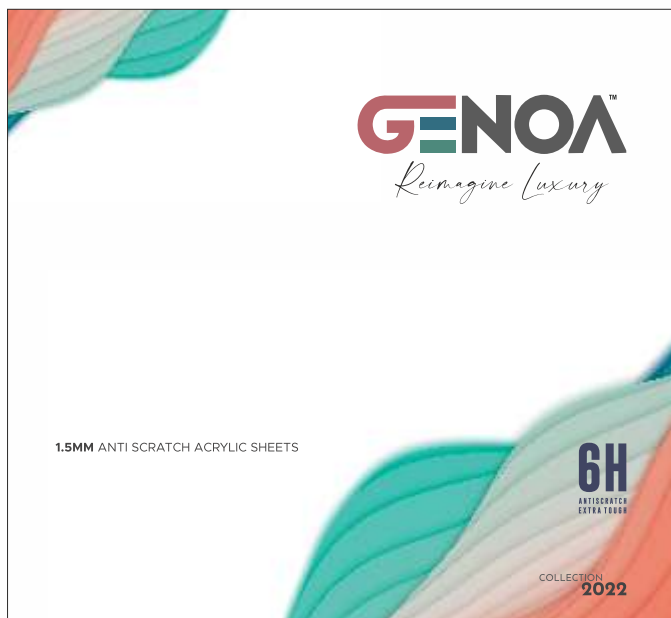

LOOKOUT FOR THIS LOGO ON SHEET

**RECOMMENDED
ADHESIVE
FOR PRESSING**



Index



Design No.	Page No.	Colour	Design No.	Page No.	Colour	Design No.	Page No.	Colour	Design No.	Page No.	Colour
GA-4301	02		GA-4005	10		GA-4002	18		GA-4414	24	
GA-4318	02		GA-4006	10		GA-4026	18		GA-4416	24	
GA-4328	02		GA-4011	12		GA-4025	18		GA-4415	24	
GA-4308	04		GA-4001	12		GA-4024	18		GA-4801	26	
GA-4309	04		GA-4012	12		GA-4023	18		GA-4802	26	
GA-4329	04		GA-4008	12		GA-4407	20		GA-4803	28	
GA-4313	04		GA-4010	12		GA-4409	20		GA-4804	28	
GA-4312	04		GA-4009	12		GA-4410	20		GA-4601	30	
GA-4316	04		GA-4016	14		GA-4413	20		GA-4602	30	
GA-4328	06		GA-4014	14		GA-4412	20		GA-4603	32	
GA-4321	06		GA-4013	14		GA-4401	22		GA-4604	32	
GA-4327	06		GA-4015	14		GA-4402	22				
GA-4304	06		GA-4017	14		GA-4405	22				
GA-4320	06		GA-4020	16		GA-4408	22				
GA-4007	10		GA-4019	16		GA-4404	22				
GA-4002	10		GA-4022	16		GA-4406	22				
GA-4003	10		GA-4018	16		GA-4411	24				
GA-4004	10		GA-4021	16		GA-4403	24				

6H
ANTISCRATCH
EXTRA TOUGH

MATT SERIES




USED LAMINATE

GA - 4301 


Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm



GA - 4301 ★★



GA - 4318 ★★



GA - 4326 ★★



ANTI
FINGER PRINT



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.


MATT SERIES




USED LAMINATE
GA - 4329 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm






GA - 4308 ★★




GA - 4309 ★★




GA - 4329 ★★



GA - 4313 ★★



GA - 4312 ★★



GA - 4316 ★★



ANTI
FINGER PRINT



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF




1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.


MATT SERIES



Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 




GA - 4328 ★★




GA - 4301 ★★




GA - 4321 ★★



GA - 4327 ★★



GA - 4304 ★★



GA - 4320 ★★



ANTI
FINGER PRINT



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS


There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES




USED LAMINATE
GA - 4030 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 




GA - 4030




GA - 4029



GA - 4018



GA - 4027



GA - 4028



GA - 4006





There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES




Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm







GA - 4007




GA - 4002




GA - 4003



GA - 4004



GA - 4005



GA - 4006



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES



USED LAMINATE
GA - 4009

USED LAMINATE
GA - 4012


USED LAMINATE
GA - 4007

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm







GA - 4011




GA - 4001




GA - 4012



GA - 4008



GA - 4010



GA - 4009




There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES




USED LAMINATE
GA - 4016

USED LAMINATE
GA - 4013


Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4016




GA - 4014




GA - 4013



GA - 4015



GA - 4007



GA - 4017



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS


There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES




GA - 4021 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm







GA - 4020




GA - 4019




GA - 4001



GA - 4022



GA - 4018



GA - 4021



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF




1.5MM
THICKNESS


There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

SOLID SERIES




USED LAMINATE
GA - 4026 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4002



GA - 4026



GA - 4025



GA - 4024



GA - 4023



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

METALLIC SERIES



USED LAMINATE
GA - 4409 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm





GA - 4407 ★




GA - 4409 ★



GA - 4410 ★



GA - 4413 ★

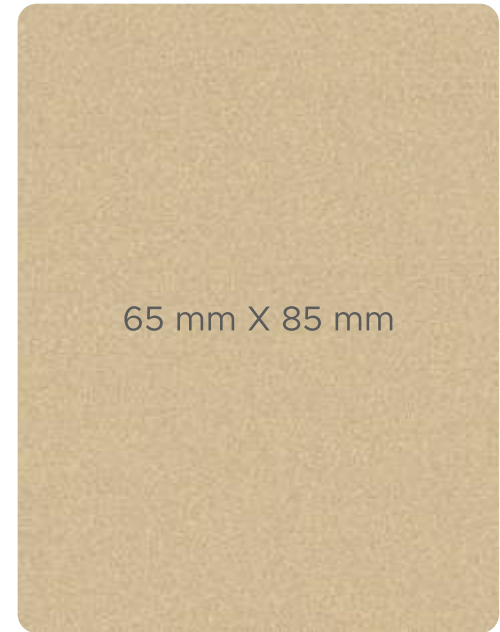

GA - 4412 ★



There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

METALLIC SERIES



USED LAMINATE
GA - 4406 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4401 ★



GA - 4402 ★



GA - 4405 ★



GA - 4408 ★



GA - 4404 ★



GA - 4406 ★





There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

METALLIC ACRYLIC




Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm






GA - 4411 ★

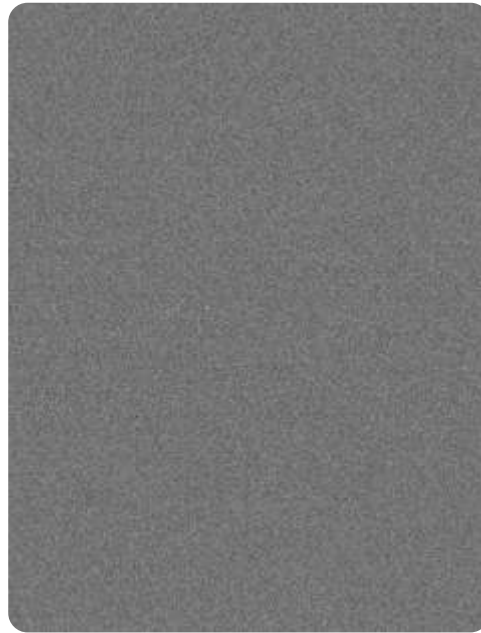

GA - 4403 ★



GA - 4414 ★

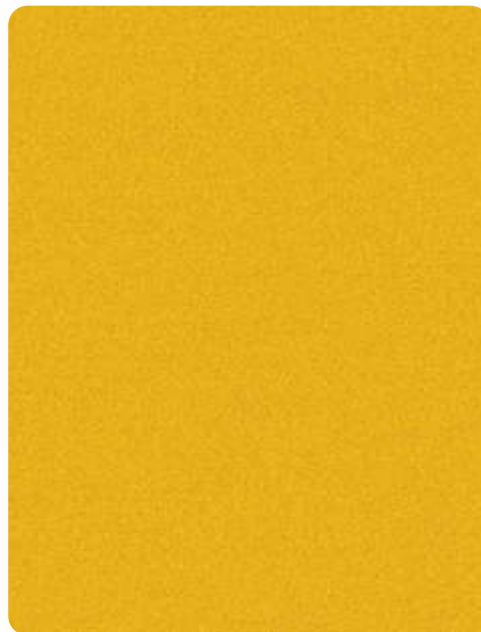

GA - 4416 ★



GA - 4415 ★



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF




1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

MARBLE SERIES



USED LAMINATE
GA - 4806 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4805 ★



GA - 4806 ★


-  UV RESISTANT
-  TERMITE & BORER FREE
-  DURABILITY & STRENGTH
-  LIGHT WEIGHT
-  WATER & STAIN PROOF
-  1.5MM THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

MARBLE SERIES



USED LAMINATE
GA - 4801 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4801 ★



GA - 4802 ★



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF





1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

MARBLE SERIES



USED LAMINATE
GA - 4804 


Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4803 ★




GA - 4804 ★


-  UV RESISTANT
-  TERMITE & BORER FREE
-  DURABILITY & STRENGTH
-  LIGHT WEIGHT
-  WATER & STAIN PROOF
-  1.5MM THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

WOODEN SERIES



USED LAMINATE
GA - 4602 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 





GA - 4601 ★



GA - 4602 ★



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF




1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

WOODEN SERIES



USED LAMINATE
GA - 4604 

Size : 2440mm x 1220mm
Thickness : 1.3mm~1.5mm 



GA - 4603 ★



GA - 4604 ★



UV
RESISTANT



TERMITE &
BORER FREE



DURABILITY
& STRENGTH



LIGHT
WEIGHT



WATER &
STAIN PROOF



1.5MM
THICKNESS

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation. Actual colour of the laminate sheet may vary from this brochure.

PLEASE FOLLOW THE INSTALLATION AND MAINTENANCE TIPS:

1. Before buying please check GENOA sticker on the product and ensure that you bought original product of GENOA.
2. Check the laminate on the time of delivery whether it has not damaged during transportation and handling and then use for installation.
3. Before installation make sure the substrate (MDF, Plywood, Particle Board) is in good quality, with even surface and calibrated thickness.
4. Clean the substrate surface by cloth, sponge, soft brush or sand paper to make free from dust or grease.
5. Always use water based PVACP (Polyethylene Vinyl Acetate Co-Polymer) adhesive like GENBOND for GENOA laminates. Stir the GENBOND adhesive gently before using it and do not mix water in the same.
6. Spread the adhesive uniformly on both GENOA laminate and base substrate by brush, roller or adhesive spreader.
7. Keep at least 2MM groove between 02 pieces of GENOA laminates, so at the time of pressing it will be easy to remove air between the GENOA laminate and base substrate. Use soft pinch roller or normal pressing technique and the pressing should be done from the middle of the panel and move towards the side line and corners.
8. Please make sure to give sufficient amount of pressing to GENOA laminate for almost 12hrs to 15hrs to achieve full bonding strength.
9. Remove the protective film within 7~15 days after completion of installation.
10. Please remove protective film from the acrylic sheets after thoroughly cleaning the surrounding area of the installation.
11. Use 95% alcohol solvent and a dry tissue to clean GENOA matt finish acrylic sheets

DO'S & DONT'S:

1. Store the laminates below 30°C temperature. To avoid the inside cracks & stretch line, do not store acrylic sheet in roll form.
2. Clean the surface of laminate with water and clean, non-abrasive cloth. We recommend cleaning with COLIN glass cleaner and soft Micro fibre cloth.
3. Glossy surfaces recommended to use in vertical applications.
4. Do not use cleaners based on alcohol, solvent, petrol, pinewood or oil as these may damage the surface of the laminate. Do not use cloth other than micro fibre.
5. Do not use thinner on the surface of GENOA laminates.
6. Do not place hot cookware directly on the laminate as the exposure to temperatures above 30°C may cause damage to the laminate surface.
7. Outdoor application of the laminate with exposure to direct sunlight and weather conditions are strict not recommended. UV rays may de-shape the laminate.

IMPORTANT INFORMATION:

- AIR BUBBLE FORMATIONS ON LAMINATE:



- Using of water based adhesive or other than PVACP (Polyethylene Vinyl Acetate Co-polymer) adhesive may also lead to air bubble after the installation of acrylic laminate. We recommend to use GENBOND adhesive.
- Bonding of acrylic laminate under high humidity atmosphere.
- Using uneven surface substrate (Plywood, MDF, Particle Board) Lead to debond at particular area of acrylic laminate and air bubble appear at that area after the installation.
- Due to uncertain weather conditions, base substrate may absorb moisture and after few days of installation base substrate gradually loses moisture resulting in air bubble formation between acrylic laminate and substrate.
- When more than 8' x 2' of Acrylic laminate is used for panelling, it can lead to air bubble after installation.
- Lack of bonding / pressing during the time of installation of acrylic laminate may lead to air bubble.
- GENOA acrylic laminates should be kept evenly straight. If the laminates are in roll form, it should kept straight for minimum 48 hours and then can press and laminate on the surface for better results.

- YELLOW PATCHES AND COLOR FADE:



- Using of inferior quality of dipped plywood & dipped lipping patti can react with adhesive which may cause yellow patches after the installation.
- When Acrylic laminate experiences or faces direct to sunlight, it may cause discolouring, fading and yellowness in laminate.
- Prolonged exposure temperature above 30°C or placing hot cookware directly on the acrylic laminates cause patches on the surface.
- Using synthetic rubber adhesive (SR / JatPat, Bostic, Heatex) lead to brown / colour patches on acrylic laminates. We recommend to use GENBOND adhesive.

Technical Specifications.




Parameters	GENOA Acrylic Laminate	High Gloss Laminate Mica	PU Coating / Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	6H Antisractch	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

RECOMMENDED ADHESIVE FOR PRESSING



PANEL STRUCTURE

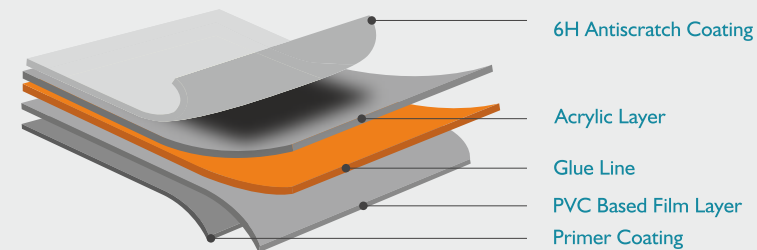

LIMITED WARRANTY:

Genoa products are reasonably free of defects and when properly handled and fabricated will comply, within reasonable deviations to applicable manufacturing specifications. Clients are advised to inspect product thoroughly prior to installation. Genoa warranty will not cover defects and non-compliance from otherwise attributable to any other causes, including without limitation:

- Improper handling / transportation / storage of the products.
 - Improper installation and unintended usage of the products.
 - Lack of / or improper maintenance of the products.
 - Exposure of the products to extreme temperatures.
 - Unauthorized alteration to the products.
 - Outdoor applications.
-
- No guarantee and no exchange in any circumstances.
 - There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variations. Actual colour of the acrylic sheet may vary from this brochure.



Our Range of **PRODUCTS**

GENOA™
Reimagine Luxury
ACRYLIC SHEET



100% PVC CORE

MANORÉ
INTERIOR LOUVERS



GEN BOND

RECOMMENDED ADHESIVE

🌐 www.genoalam.com ✉ info@genoalam.com

There can be colour variation in material from different batches. It is advised to use same batch material to avoid colour variation.
Actual colour of the laminate sheet may vary from this brochure.