


Marketed by:









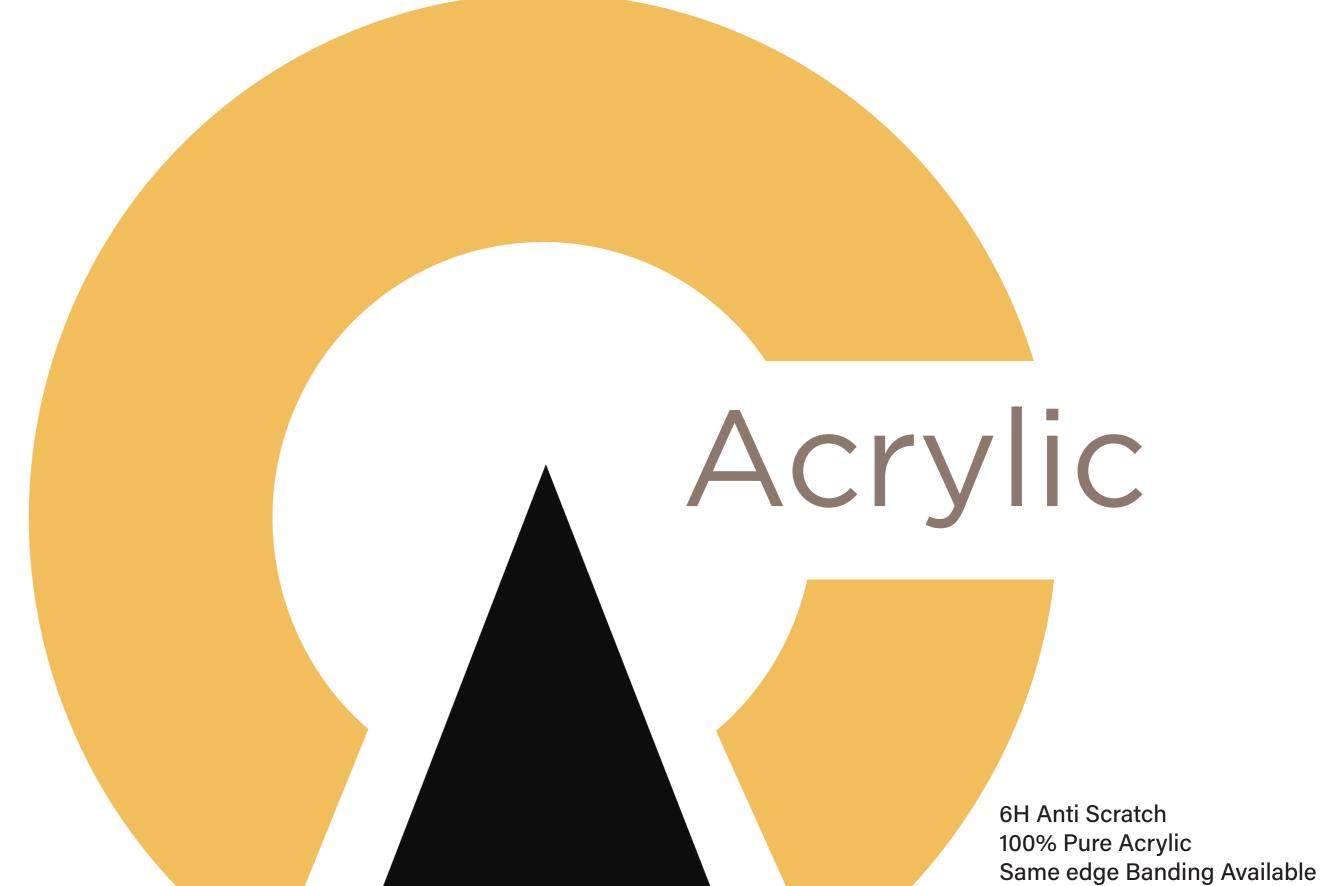



Enjoy the exqusite tastefulness of acrylic collection to enliven the presence of bright visionary ideas into your space!

The acrylic laminates line produced under the name collection of Acrylic comes with high-quality finesse and colour variances but there are a few warnings that the customer needs to be notified about before buying the beautiful line of Alimo products.

- Check the laminate products at the time of delivery. Keen eye for assurance of whether the goods weren't damaged in the transportation
- Before installation of the laminate line check for the subtrate quality to be superior and of calibrated thickness.
- Make sure to clean the surface of the subtrate utilised for any kind of dust or grease with the aforementioned cloth quality of micro fibre • Do not use synthetic rubber adhesive.
- Stir the adhesive before using it. And do not mix water in the adhesive. Please avoid direct sunlight at all point for the acrylic laminates, Assure even spreading of adhesive with uniformity of a brush, roller or adhesive spreader on the acrylic line of laminates.
- Use the non-printed side of the subtrate (Plywood, MDF, Particle Board) for the best results possible.
- Do not use any uneven surface of subtrate because it could damage the or affect the acrylic laminate in its appearance and finishing and could increase the chances of appearance of air bubbles in future.

- Use only soft pinch roller or normal pressing on acrylic laminates on the subtrate. Pressing should only be done from the middle of the panel and move towards the side line and corners of the panel so that air between the acrylic laminate and subtrate will be removed.
- Make sure, to give sufficient amount of pressing to the acrylic laminates for almost 12hrs to 15hrs to achieve full bonding strength.
- colour and the finesse to be protected.
- Acrylic laminates is not to be utilised for placement of hot cookware directly. Prolonged exposure to high room temperatures may cause appearance of patches on the surface and damage the acrylic laminates from within.

Disclaimer: There can be colour variation in the material from different batches. It is advised to use same batch material to avoid colour variations. Actual colours of the Acrylic laminate sheets/Acrylic Edge banding may vary from this brochure.



LET IN THE BROADER VIEW OF FABULOUS HOMES!

6H Acrylic Laminate



















AC 8021 AQUA AC 8001 SNOW AC 8014 FLINT

EB 8021 EB 8001 EB 8014

























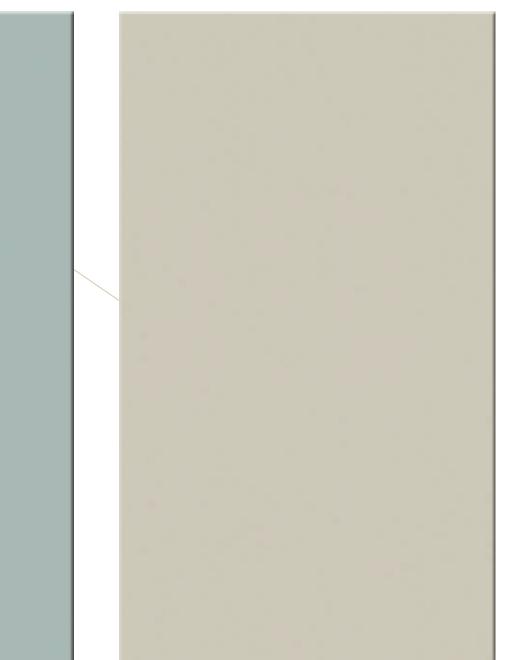

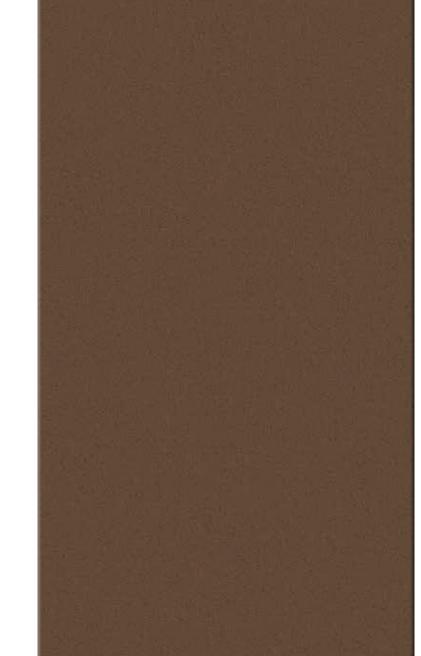

AC 9104 FERN






























02 LATTE	AC 910

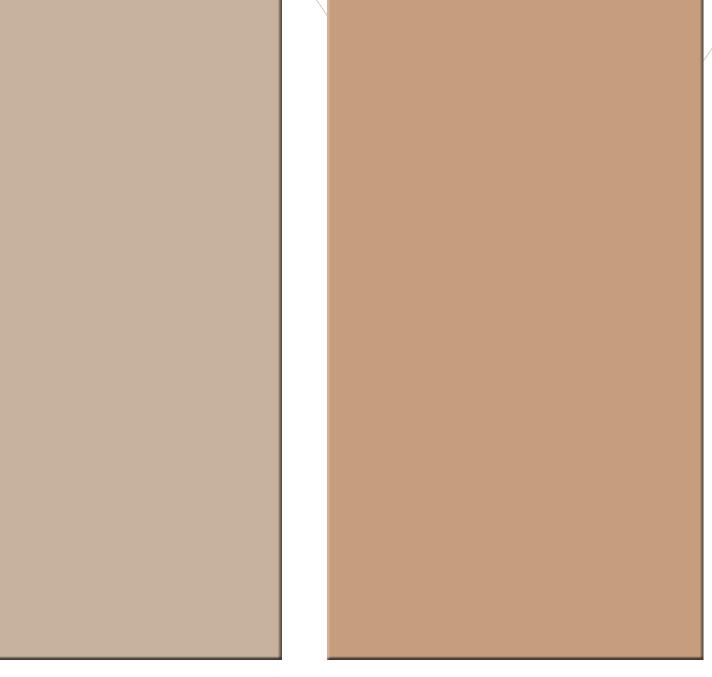



EB 9103 EB 9101 EB 9102





















05 SMOKE	AC 9201 TORTILLA	
IO5 SMOKE	AC 9201 TORTILLA	

AC 8002 COTTON

EB 9201

EB 9105




















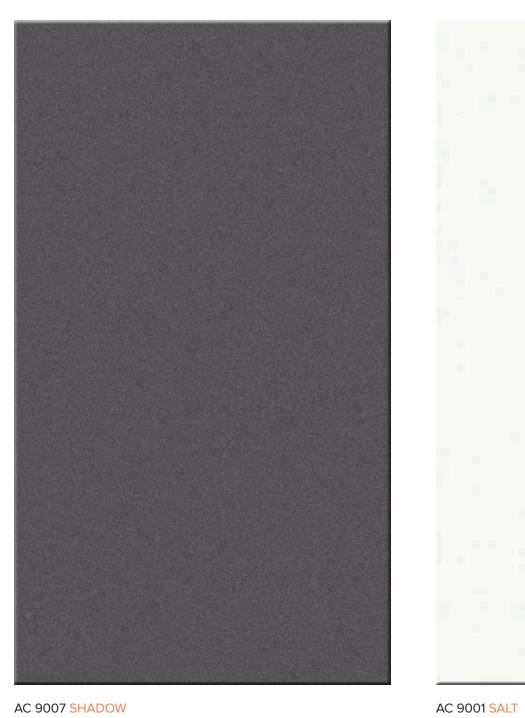







AC 9010 MATIYA



EB 9007

EB 9001






















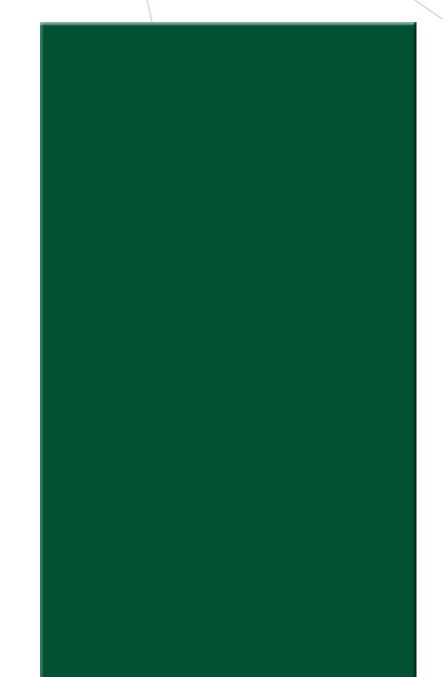
































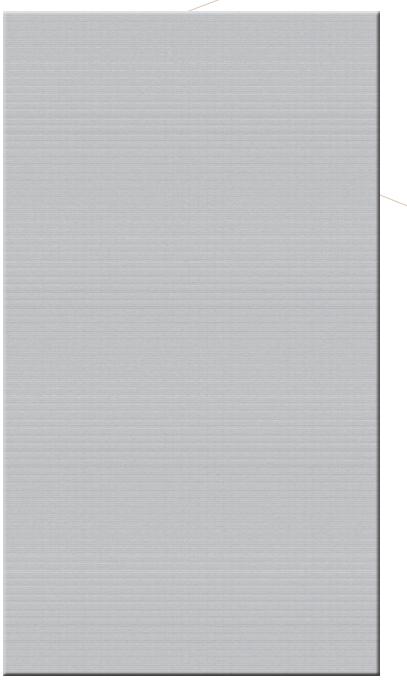

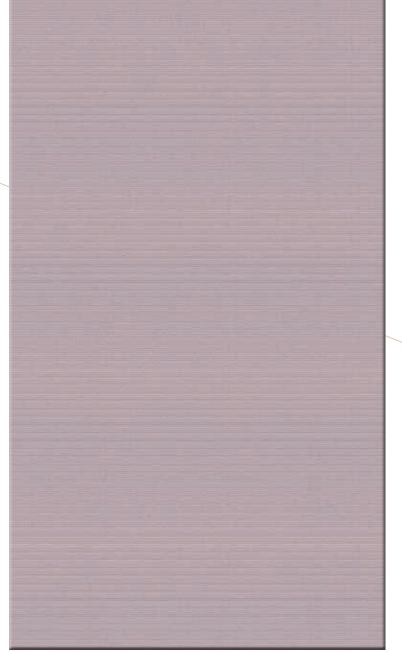

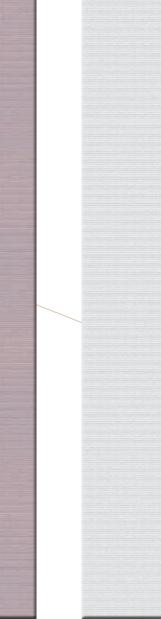













EB 9003

























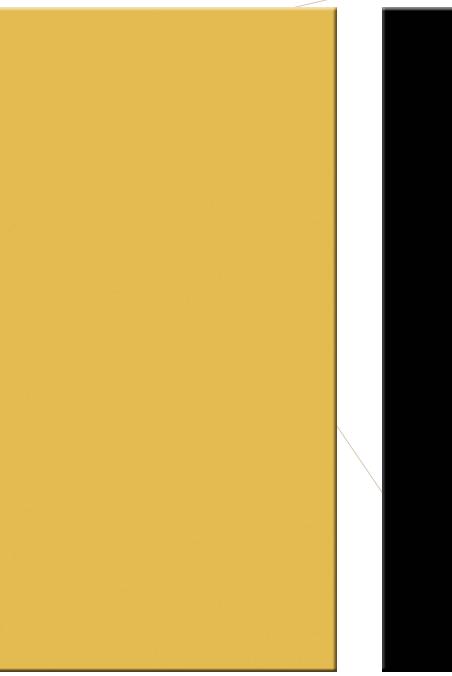

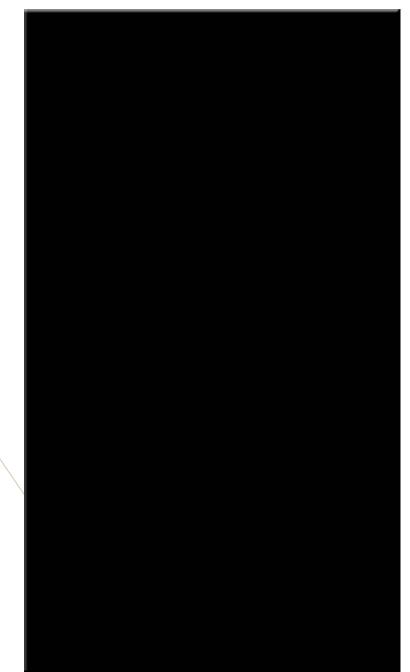









































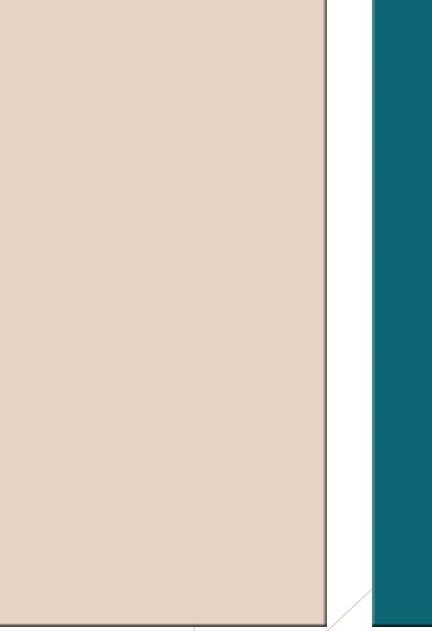

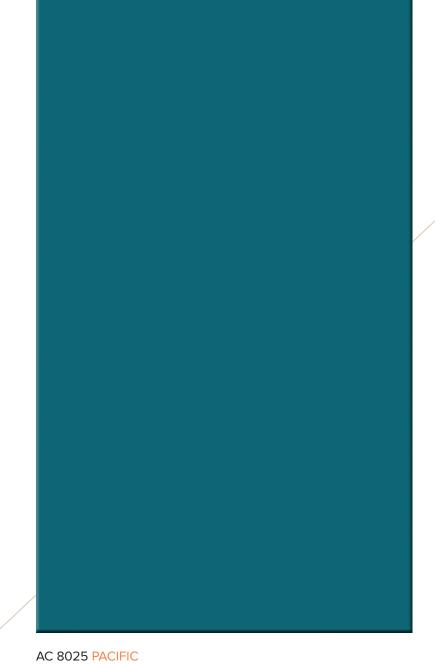









AC 8013 MASKA

EB 8025





















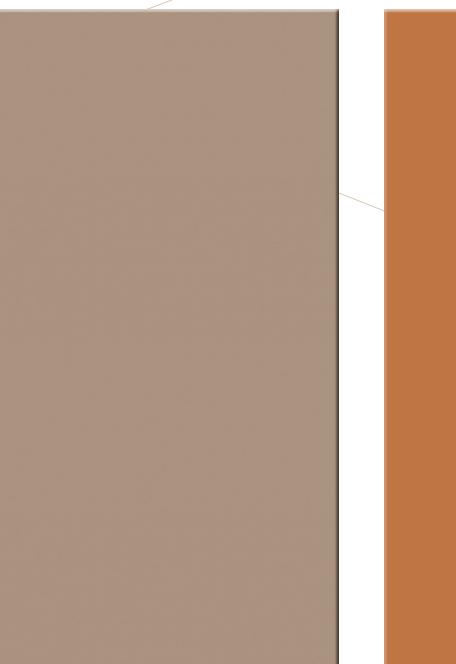

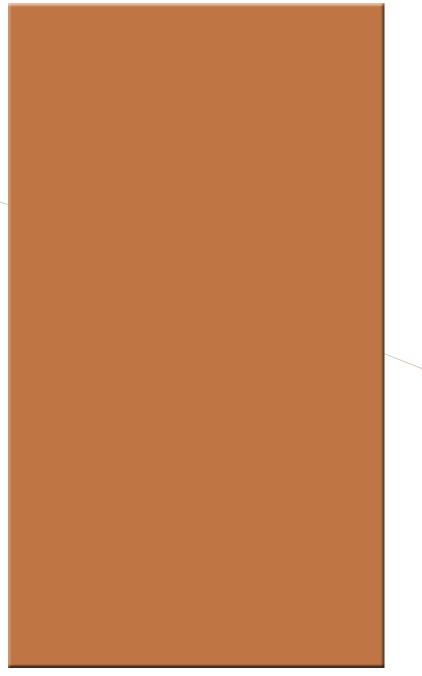







AC 8005 FOSSIL





























AC 8001 SNOW

EB 8001

AC 9204 CONTOUR




























AC 8026 OCEAN

EB 8026

AC 8023 LAVENDER



APPLICATIONS



Bathroom



Healthcare



Furniture



Commercial



Kitchen



PLEASE REMOVE PROTECTIVE FILM WITHIN 6/7 DAYS OF INSTALLATION



The flawless design structure of our acrylic sheets are engineered to be extremely light weight and easy to apply.



advanced processing procures the right amount of manufactured thickness which provides forever THICKNESS strength to the laminate sheets.



Our acrylic sheets developed with technologically advanced processing are Anti-Scratch and & STRENGTH stain resistant.



The advanced sciences enables our acrylic sheets to fight against termites and borers for several



Our 6h acrylic sheets are manufactured to repel water and stains for a long time.



The exemplary adhesion properties enables our collection of acrylic sheets to be presented in vertical

Available Size: 2440mm X 1220mm (8ft X 4ft) Thickness: 1.5 mm (± 10%)

















TECHNICAL SPECIFICATION

Parameters	Acrylic Laminate	High Gloss Laminate Mica	PU coating/ Duco Paint	Back Painted Glass
Gloss Level	>90	>70	>85	>85
Scratch Proof	Anti scratch	NO	NO	NO
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange peel	NO	YES	YES	NO
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
DRY Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	NO	YES	YES	YES

