OUR PRODUCT RANGE























cosmicdecormumbai@gmail.com






f cosmicdecor 🧿 cosmicdecor









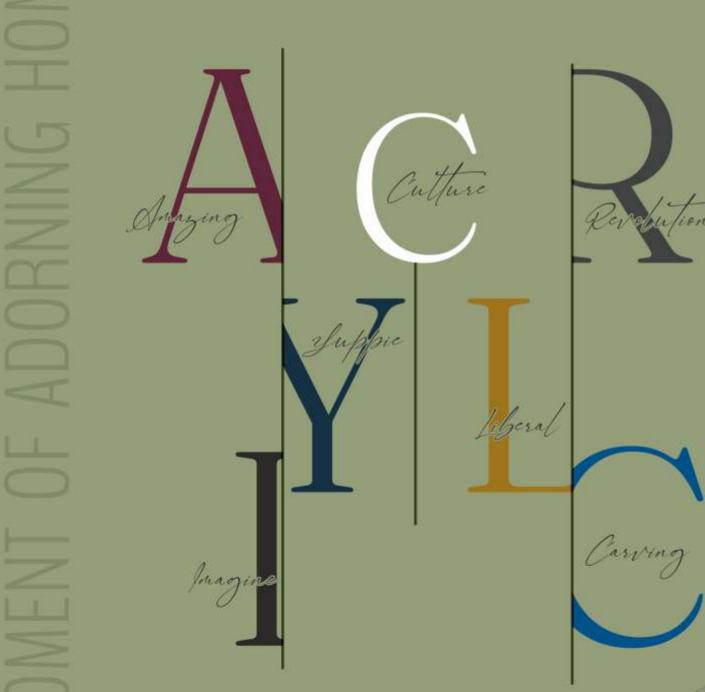







SOMETHING

"We, Cosmic Decor, Strongly Believe in Customer Satisfaction, Which is of core importance for our Existence. We Are on current position with lots of efforts towards quality, Reliability & Timely Delivery. Our mentality greatly resembles a perfect blend of creativity with Simplicity enhancing your business with dazzling first impression. We always stand to provide with nothing but the best. Our leading principles and values create us very sound for domestic and Global Relations."



APPLICATION

KITCHEN Worktops, Tables, Doors, Shelves, Cabinets, Trolleys


BATHROOM Worktops, Shelves, Cabinets

FURNITURE HEALTHCARE

Wall Lining And Horizontal Surfaces, Lockers, Cabinets, Trolleys

COMMERCIAL HOSPITALITY & RESTAURANT

TABLES Counter Tops, Doors, Cubicles, Lockers, Cabinets

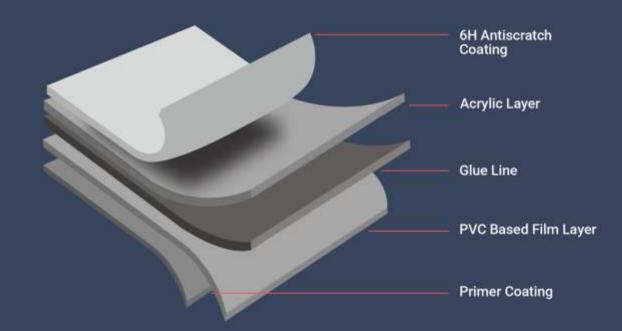









Termite & Borer Proof





Long







Colour Code



Wipe The Surface Clean Using A Light Lightly Spray On. Circular Motion



Shake It Well & The Surface







Crystal is an exceptional offering by none other than Cosmic Decor for you to Experience The Luxury. This collection of 100% acrylic laminate is the epitome of beauty and flamboyance. With high gloss finish and 6H Anti Scratch layer, the Crystal collection also delivers on functionality and not just on aesthetics. The Crystal decorative acrylic laminates & panels are available in a wide variety of colors to ensure they can complement almost any décor. On top of that, these marvelous surfaces are manufactured as per international quality standards, which ensures these surfaces last a long time without any of its features diminishing.

So, bring in this exclusive collection high gloss acrylic laminates with anti-scratch features to give your space a wonderful gift of brilliance.

CLEANING INSTRUCTION AND MAINTENANCE

CRYSTAL High gloss acrylic laminates comes protected with a highquality protective film which is only removed at the completion of all installation work. After the protected film is removed, there is still presence of solvent from the adhesive coating of the protective film on the surface of the high gloss acrylic laminate. An electrostatic charge is built-in and attracts dust onto the surface of the panel.

During this time, the acrylic laminate surface also cures out under the influence of normal air humidity. Under normal circumstances, the 'Curing' process will take approximately 72 hours for the surface to be totally cured. In order to speed up the process, we recommend cleaning the high gloss surface with COLIN Glass Cleaner and soft Micro fiber cloth.

WARNING

DO NOT use any of the following cleaning products. | Alcohol-based cleaners Solvent-based cleaners | Petrol, pinewood or oil based cleaners

Cloth other than a micro fiber.



Available in Size Thickness: 1.5 mm (15%+/-) 2440mm X 1220mm (8ft X 4ft)




EDGE BANDS Thickness: 1.3 mm Width: 23 mm









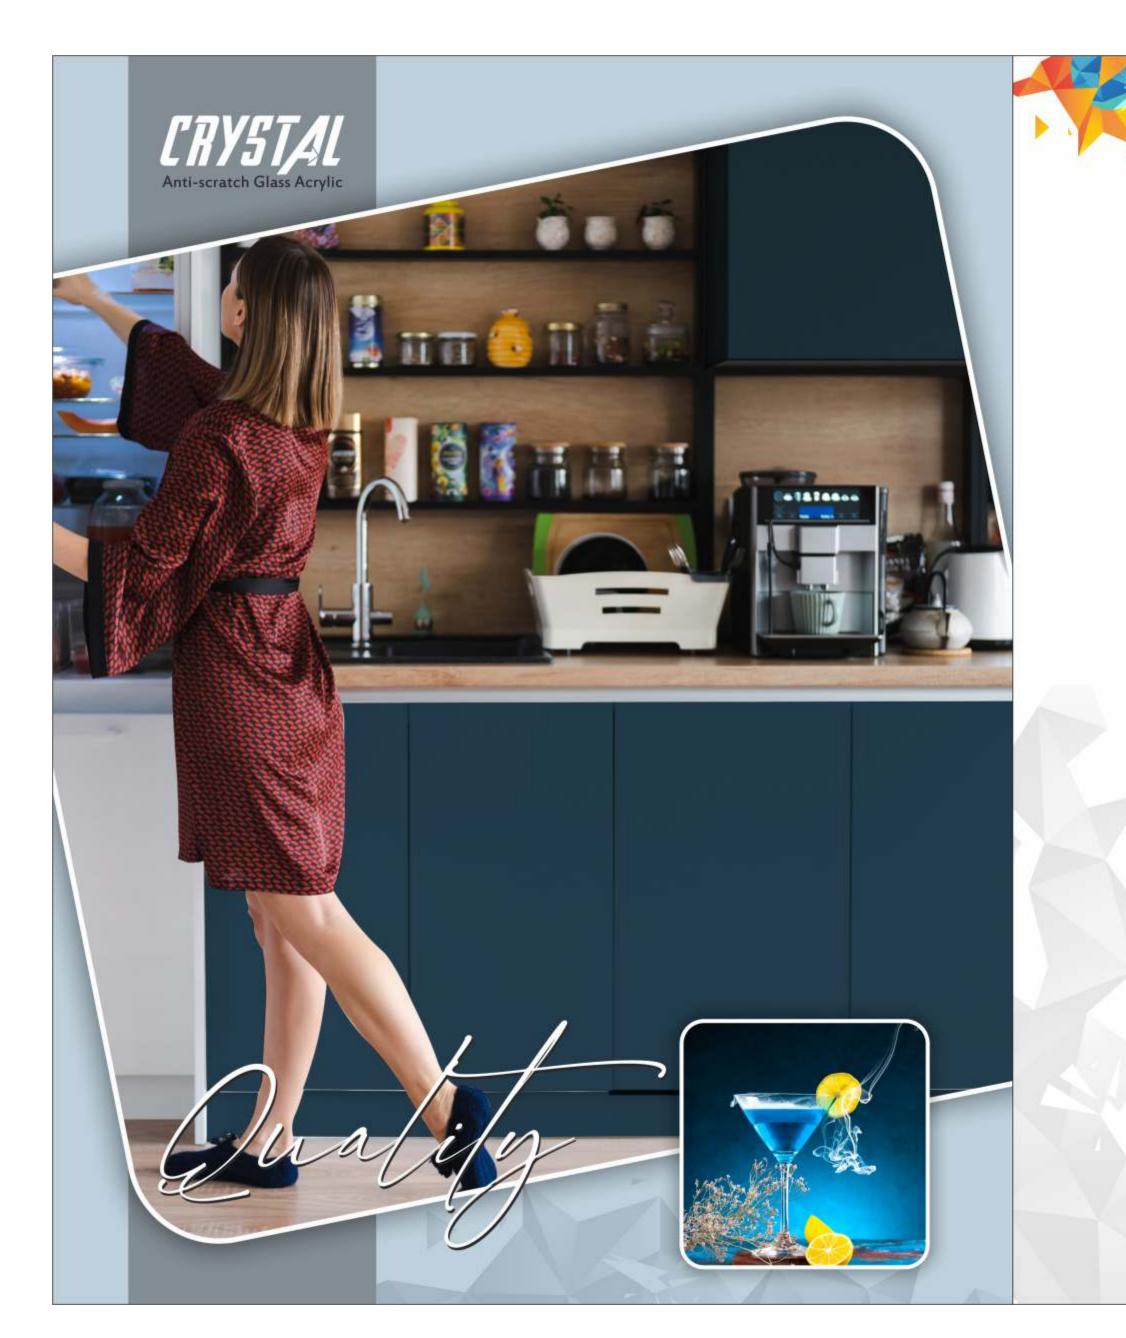

De Design your Dream upto the Best



EDGE BAND ROYAL BLUE CS - 219

23mm
x
6 x 3 inch

EDGE BAND SNOW WHITE CS - 227

23mm x 3 inch


EDGE BAND TURKISH BLUE CS - 216



Renovate the Beauty of your Home

23mm x 6 x 3 inch 3 inch

EDGE BAND FOG GRAY CS - 220

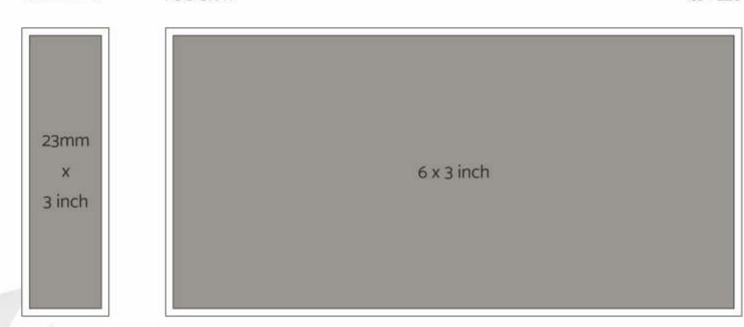

EDGE BAND SMOKE GRAY CS - 221



EDGE BAND CHARCOAL GRAY CS - 222












SATHWARIYA



CS - 001



EDGE BAND

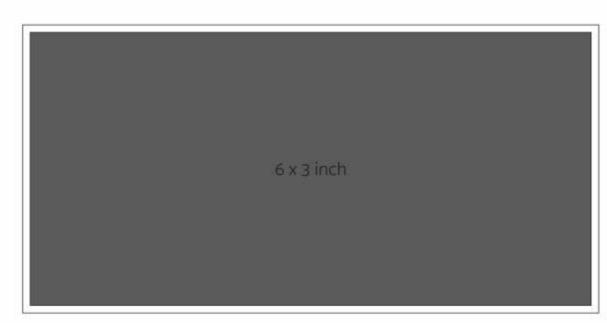


METAL BLACK METALLIC

CM - 405








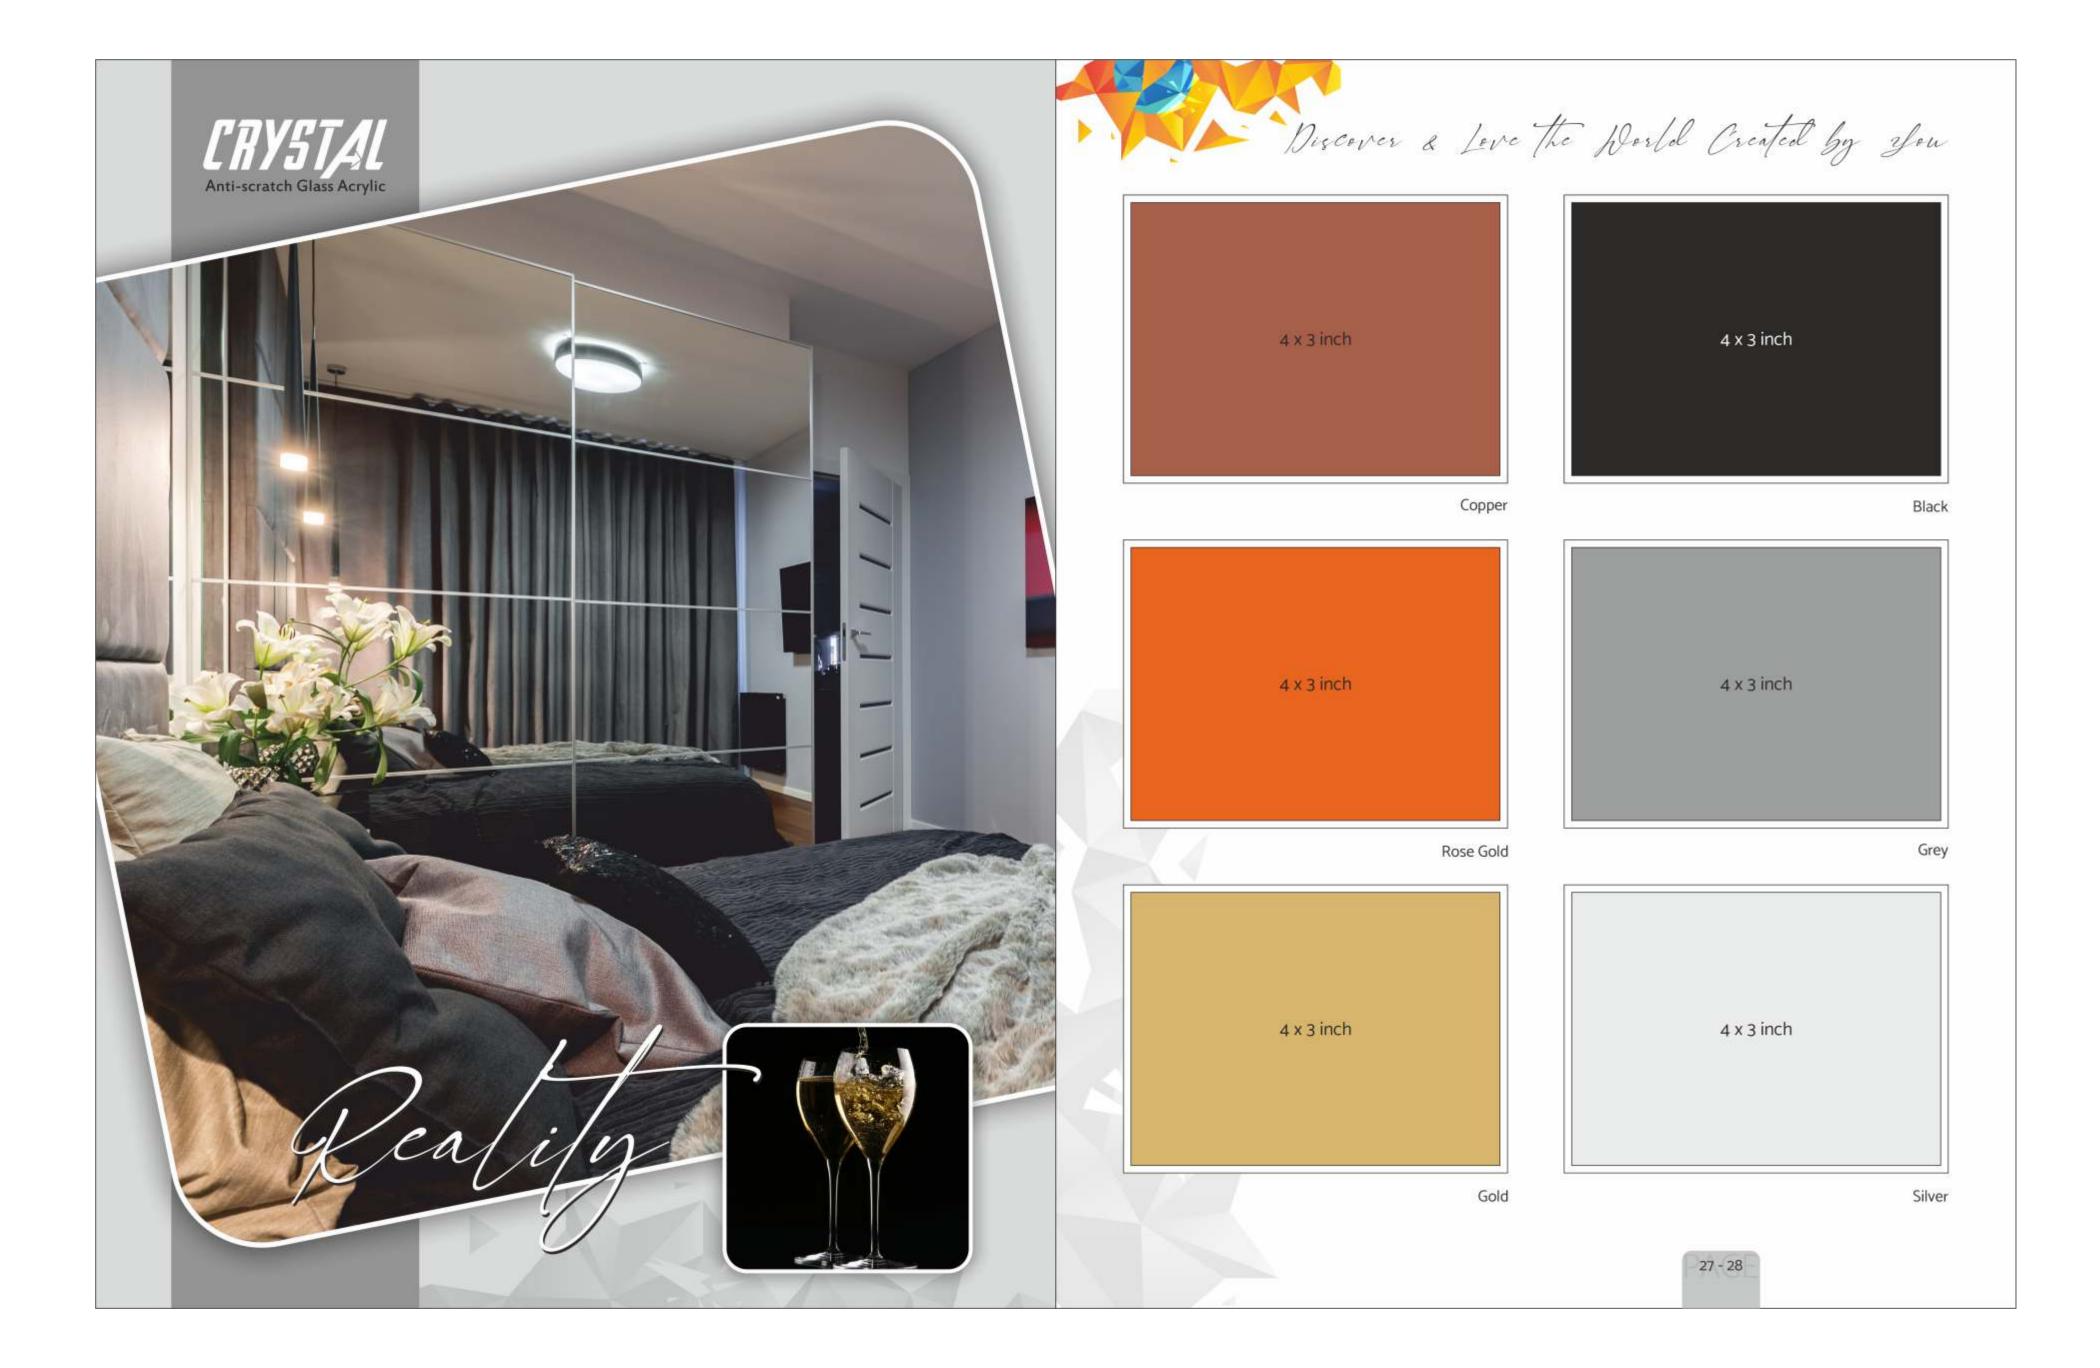

Architecture
Is Sculpture
With The
Gestures Of
Human
Occupation.

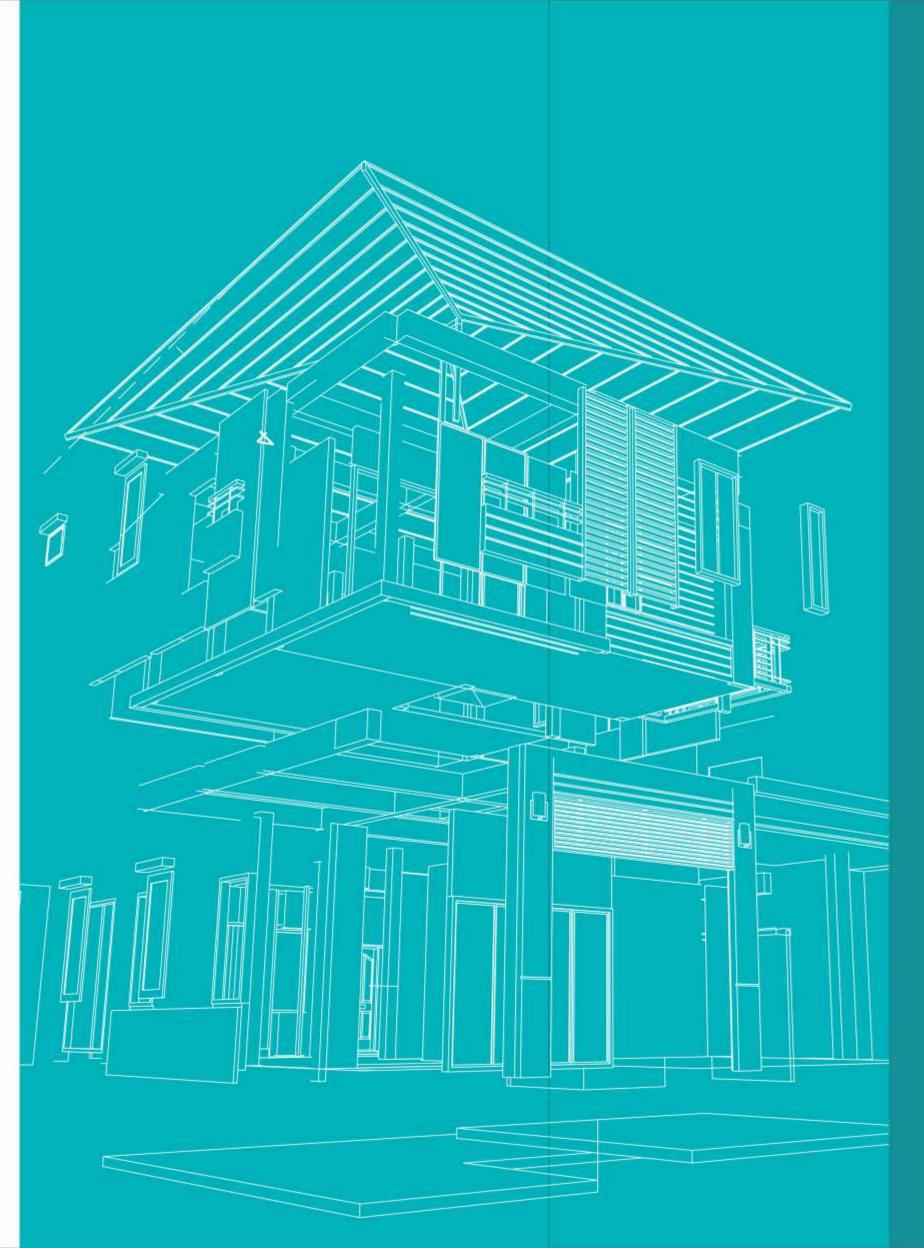

Technical specification

Thickness: 1.5mm (+/-10%) standard size: 8"x4"

Range: these sheets come in a wide range of designs and colours.

Adhesives: we recommend the use of Chipku - Cosmic Decor glue for pasting. Chipku glue is a special adhesive for acrylic & pvc laminates. We do not recommend the use of heat activated adhesives.

Lamination: proper substrates must be used and careful bonding procedures must be observed. Substrates should be of good quality plywood, high density particle board or high quality fiber board. The face of the substrates must be smooth and free of grease, wax, dust, chips and other foreign matter. We do not recommend any kind of coat like pu base, melamine, lamination (wax) on our products. These products are manufactured from natural resources. Therefore, this application will spoil the originality and natural beauty of the laminate sheet.

Cutting & machining: these sheets can be cut, routed and drilled, with most standard wood working tools or equipments. All blades must be sharp. To remove any burns that may occur in the cutting process, we recommend the use of smooth file to feather all corner edges.

Bending & forming: all radius bending should be handled in the same manner as all grades of non post forming decorative laminates.

Maintenance: any cleaning agent containing acids, alkalis or abrasives should not be used to clean this laminate.

Storage: it is always advised that the sheets and the substrates are stored at temperatures between 22 c and 32 c at relative humidity of 45.55%

Warning: these product are free from all manufacturing defects and are fit and suitable for usual purpose normal and proper use. The product must be inspected prior to installation.

These products have no guarantee, no return & no exchange.

* no guarantee in any circumstances, there can be colour variations in material from different batches.

It is advised to use same batch material to avoid colour variations.