

OUR EXCLUSIVE PRODUCTS RANGE



Recommended Adhesive For  
**ACRYLIC SHEETS**

There can be colour variation from KORI batches.  
It is advised to use same batch material to avoid colour variations.  
Actual colour of the Acrylic sheet may vary from this brochure.

MARKETED BY :




[WWW.KORILAM.COM](http://WWW.KORILAM.COM)



COLLECTION  
**2024**



*Versatility Meets Excellence*


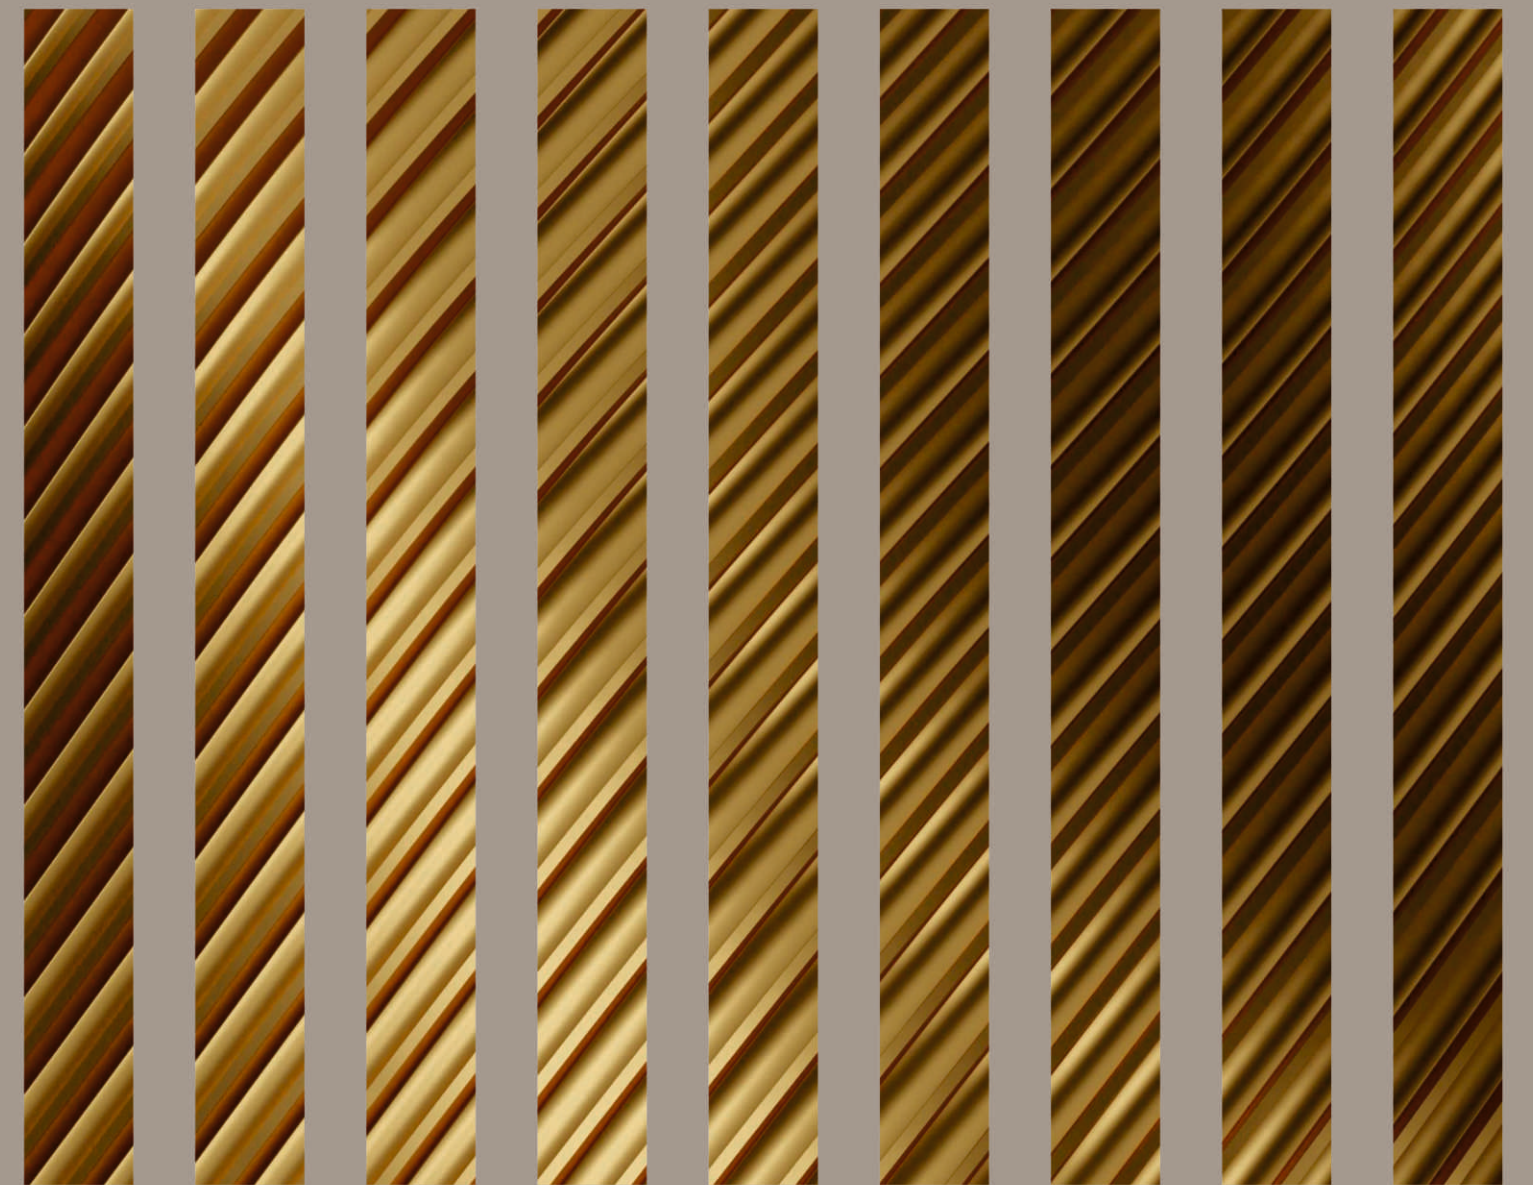


COLLECTION  
**2024**



**FLUTED**  
ACRYLIC PANEL

 **KORI™**  
*Live your interior...*

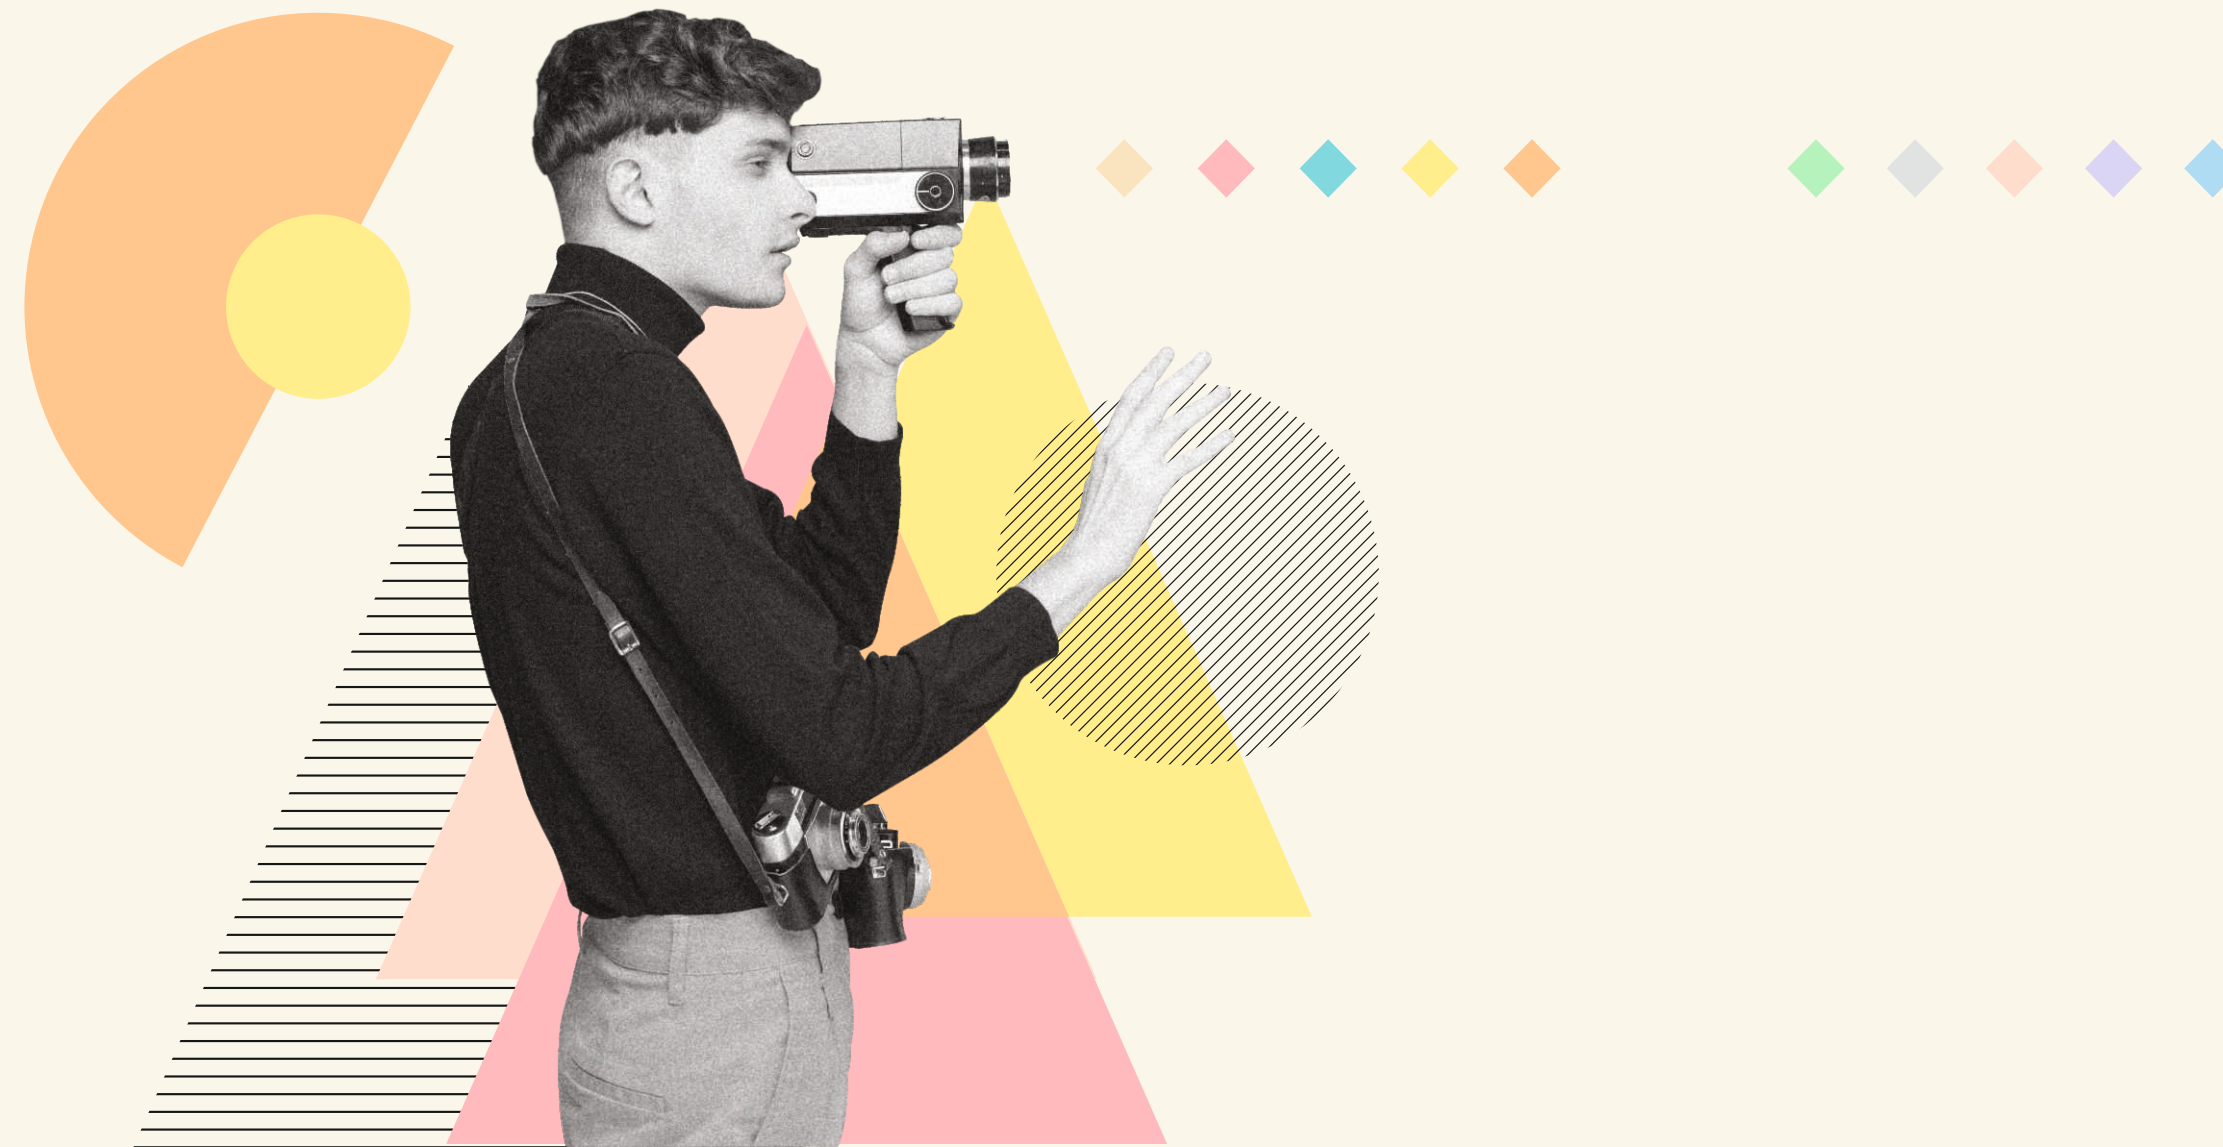

## ABOUT US

We bring to you a new fashion trend in contemporary homes, encompassing any piece of furniture with a shiny and highly reflective, super smooth, polished finish, imagine replicating this look with just about any type of furniture—from bathroom cabinets, to glossy living room furniture to elegant fitted wardrobes in the bedroom. It looks stunning. It creates a fabulous contemporary look in any modern house, apartment, showroom, office restaurant, receptions, conference room, retail counters etc.

This unique finish created a smooth, clean, contemporary and minimalistic feel in any home. It brightens up any room by reflecting light instead of absorbing it. By day, as long as there is some sunlight entering the house, your new glossy surfaces will keep the house illuminated and energetic. By night, it reflects artificial light provided by overhead light and lamps. This adds another dimension to flat or dull spaces, can completely changes the look of a room. So go on, use laminates and create your own masterpiece.



# KORI™

Live your interior...

## APPLICATION



KITCHEN



FURNITURE



COMMERCIAL



BATHROOM



SHOPPING MALL



HOSPITAL



RESTAURANT



PARTITION




WALL CLADDING

## FEATURES



### Durability & Strength

Our anti scratch acrylic laminates are extremely sturdy and durable. they can withstand heavy loads easily



### Termite & Borer Free

Our Laminates are specially treated to ensure they remain termite and borer free for several years.




### Water & Stain Proof

Treated with a special coating on the surface, our 6h anti scratch acrylic laminates are water proof as well as stain resistant



### Light Weight

For ease of use and effortless installation, our range of laminates have been developed in a way to keep them extremely light weight



### Ideal for Vertical Application


our range of laminates has effortless and exceptional adhesion properties, which allows it to be used in vertical applications.

### Available in

Size : 2440mmx1220 (8ftx4ft.)

Thickness : 2.2mm to 3.0mm(+/- 10%)




 **Fluted Finesse**  
2.2mm Thickness

 **KORI**  
*Live your interior...*




KR-1101

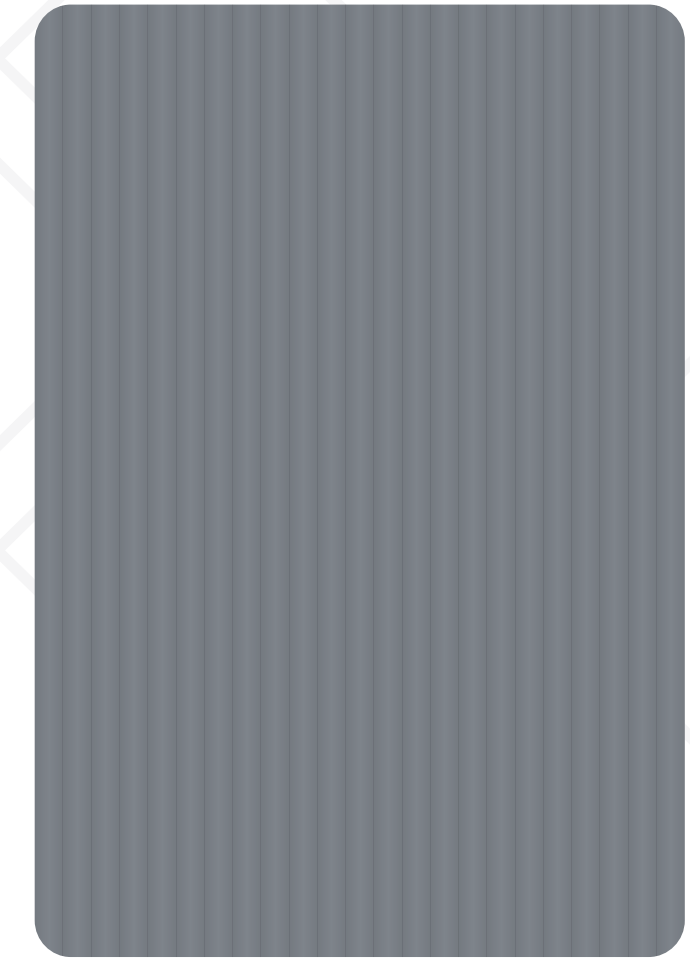

KR-1102




KR-1103

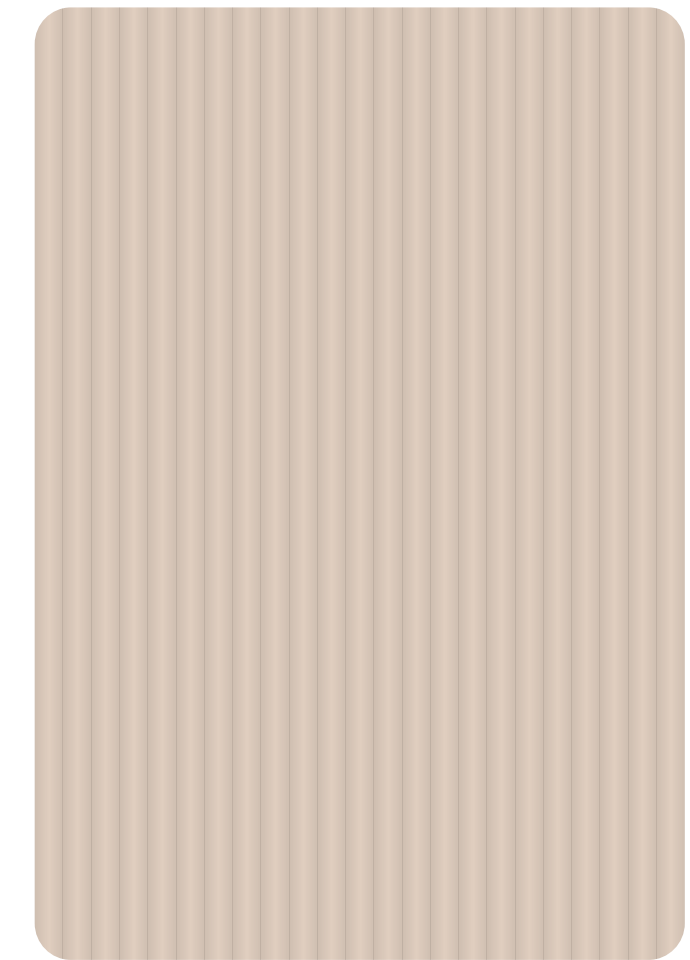

KR-1104




 **Fluted Finesse**  
2.2mm Thickness


 **KORI**  
*Live your interior...*



KR-1105

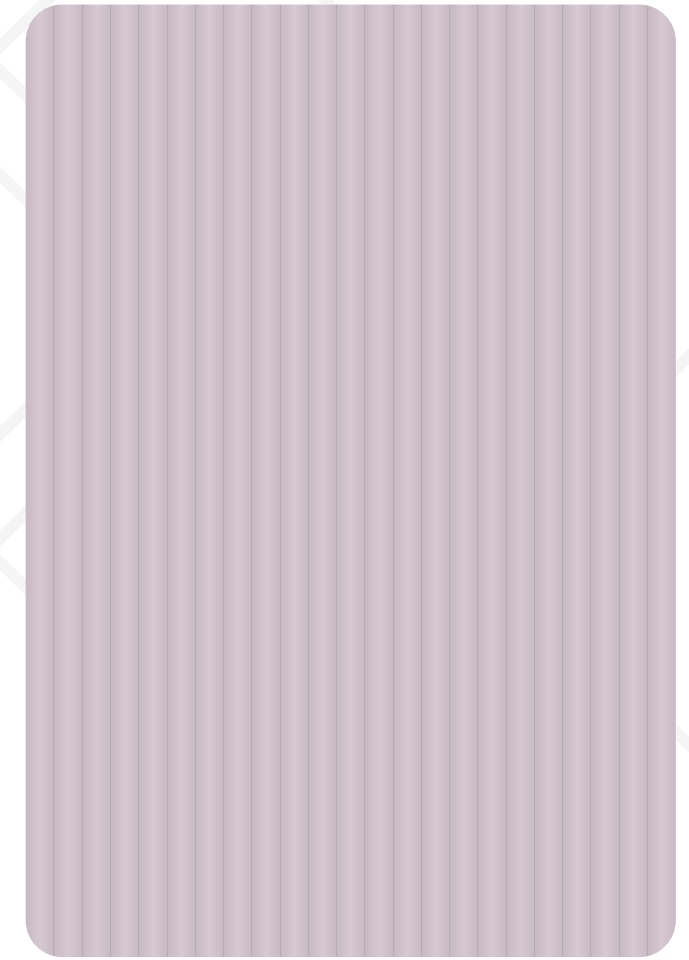

KR-1106

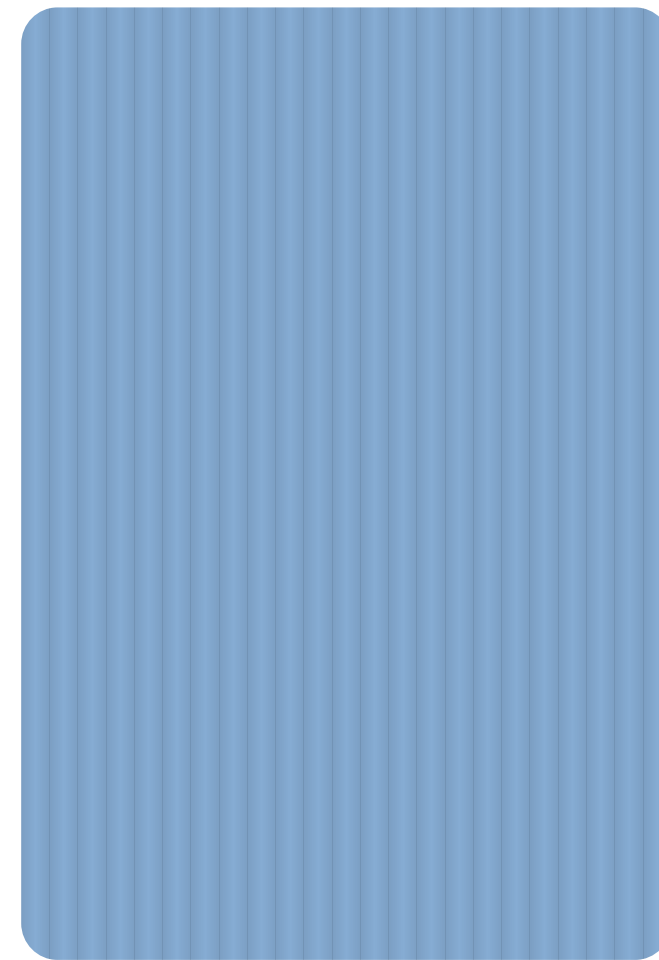

KR-1107



KR-1108




**Fluted Finesse**  
2.2mm Thickness


**KORI™**  
Live your interior...



KR-1109

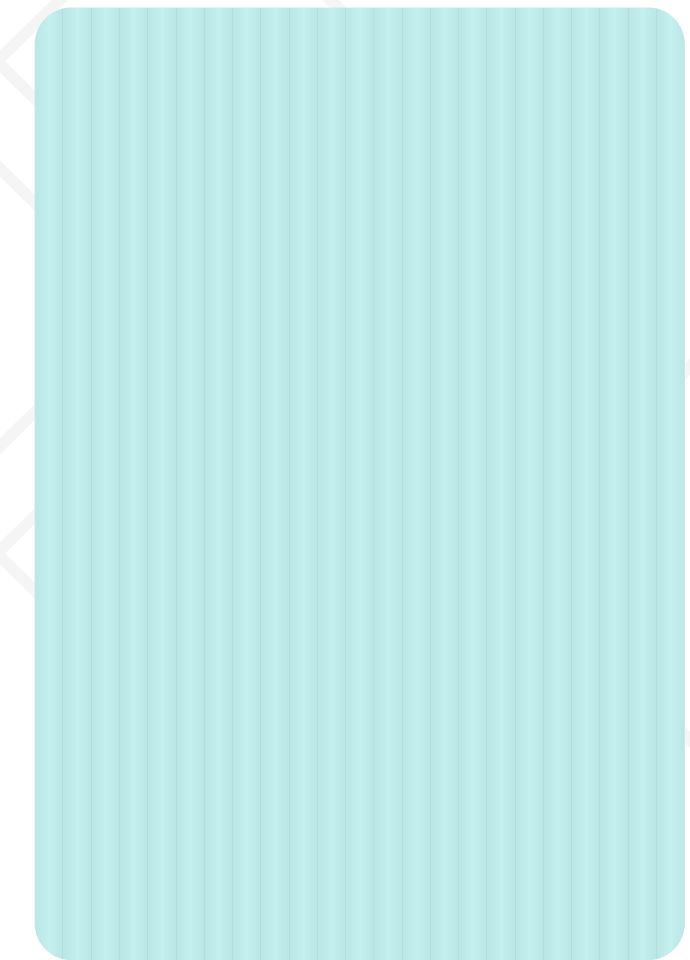

KR-1110

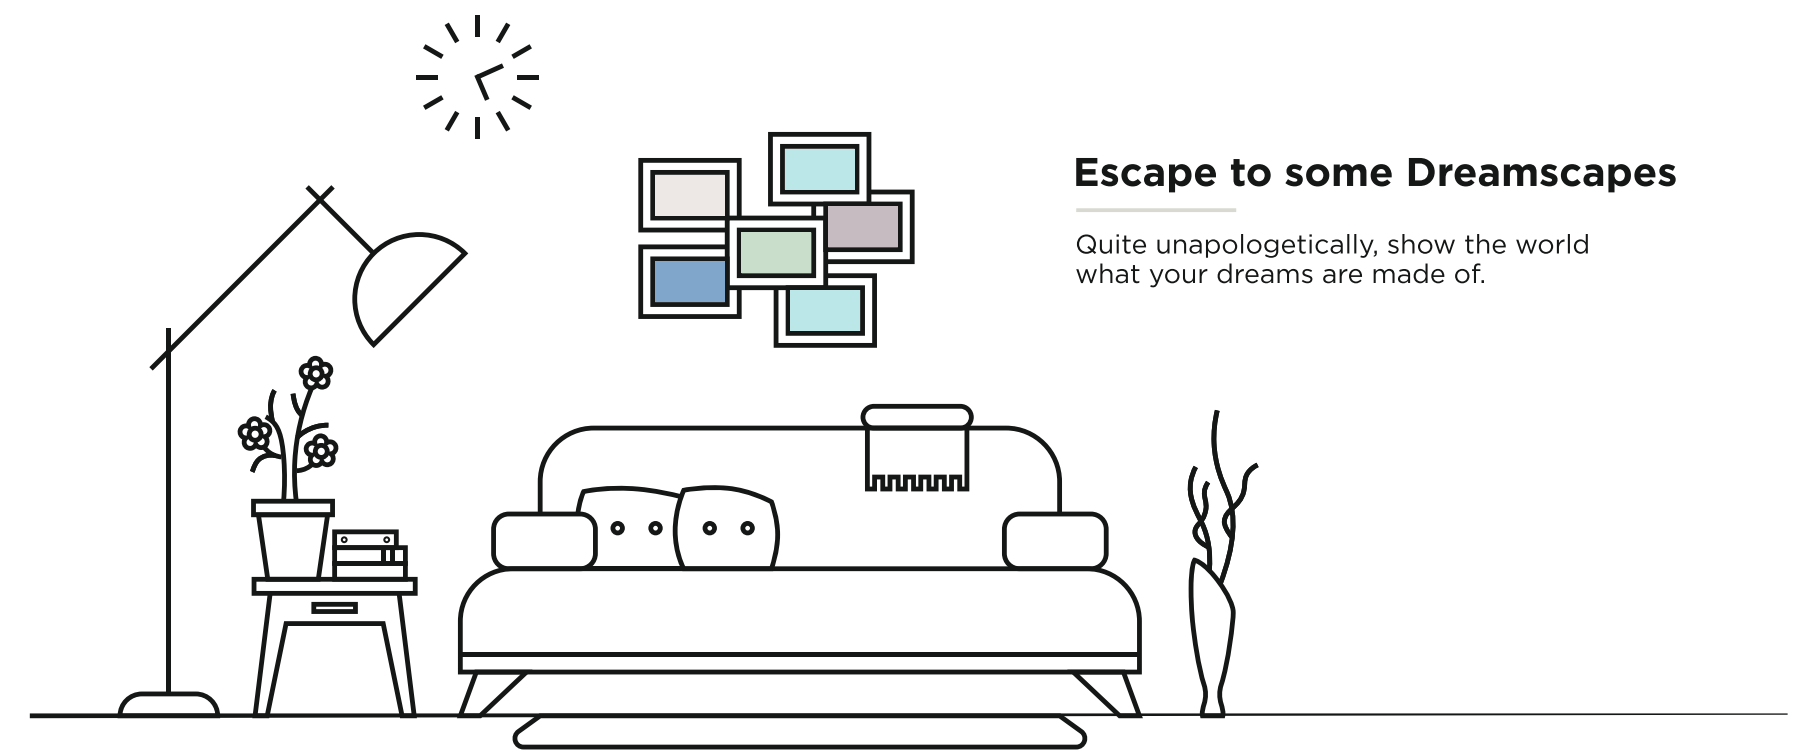

**Escape to some Dreamscapes**

Quite unapologetically, show the world what your dreams are made of.





**Translucent Textures**  
 2.5mm Thickness


**KORI™**  
*Live your interior...*




KR-1201 PR

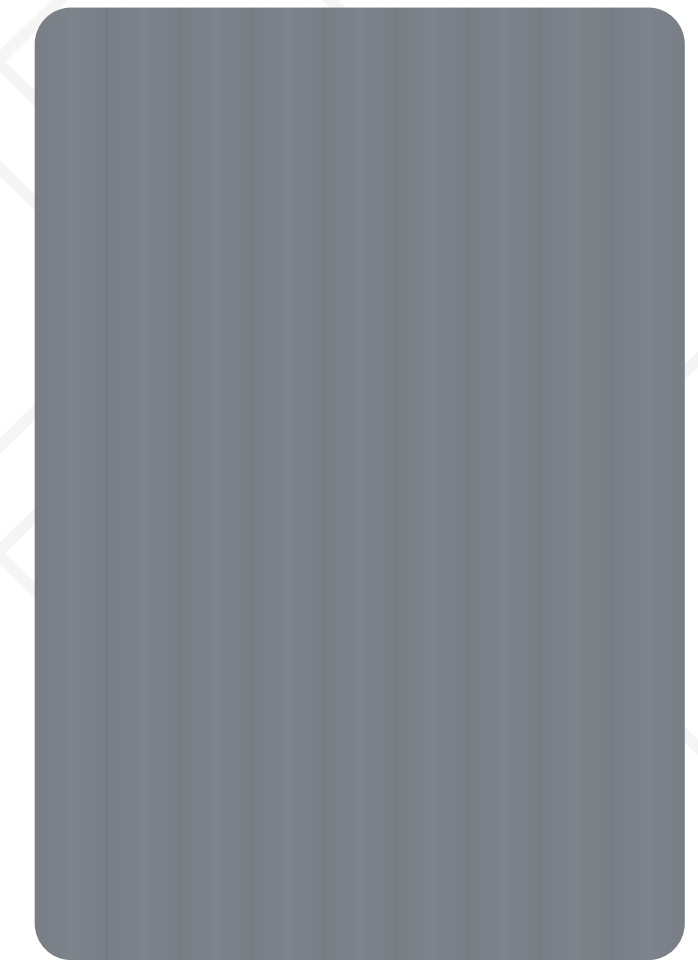

KR-1202 PR



KR-1203 PR

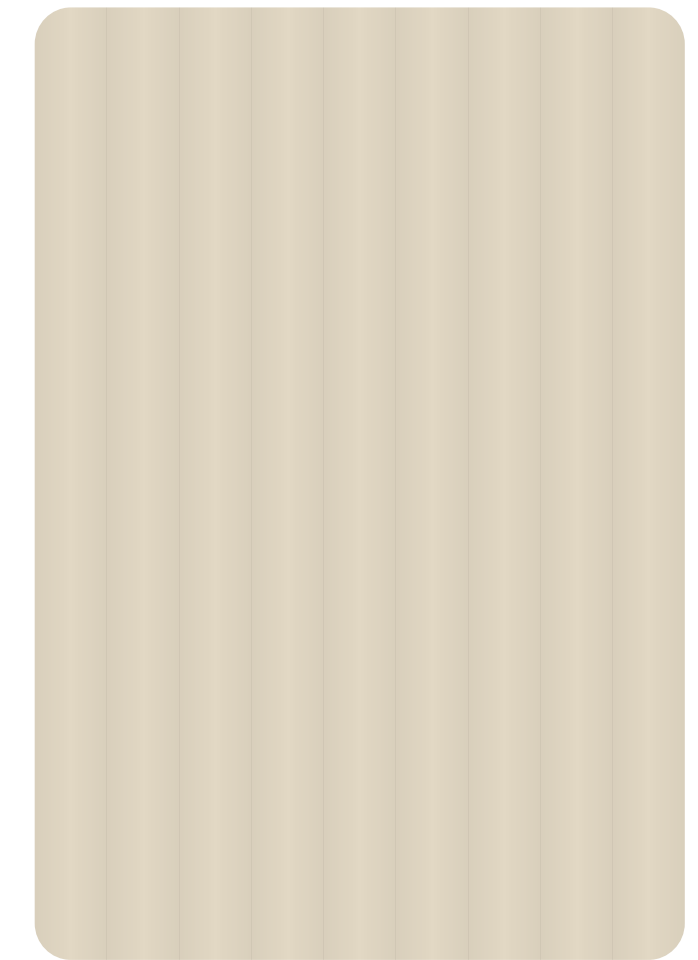

KR-1204 PR




**Translucent Textures**  
2.5mm Thickness

**KORI™**  
*Live your interior...*



KR-1205 PR

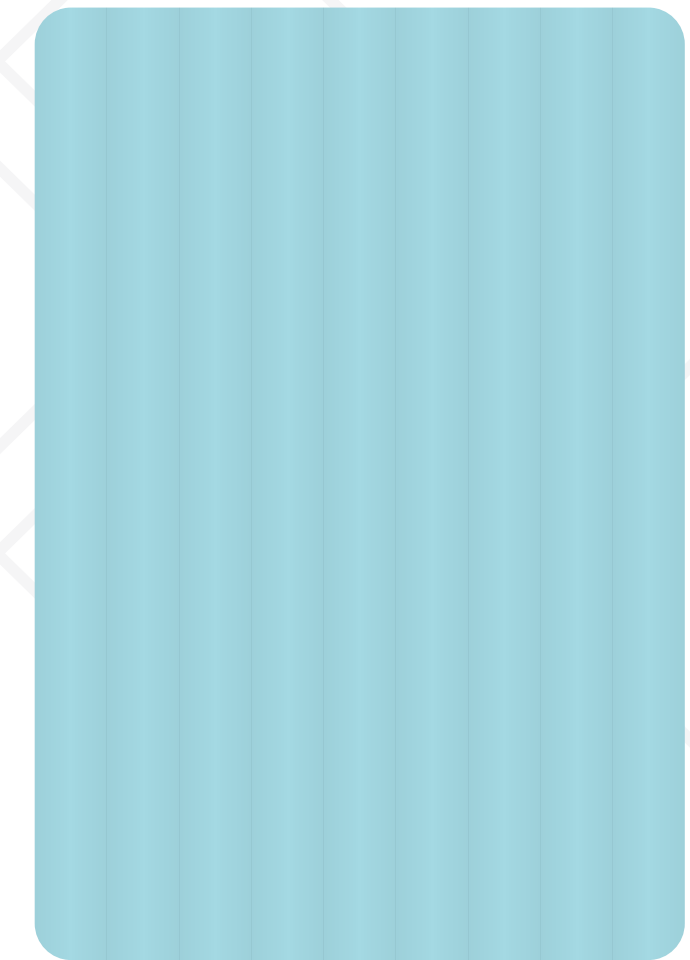

KR-1206 PR



KR-1207 PR




**Elements of Rare Ambiance**

Switch the mood of any space with This style statement and step back in awe.





 **Pristine Pleats**  
2.5mm Thickness

 **KORI**  
*Live your interior...*




KR-1301 PR



KR-1302 PR



KR-1303 PR

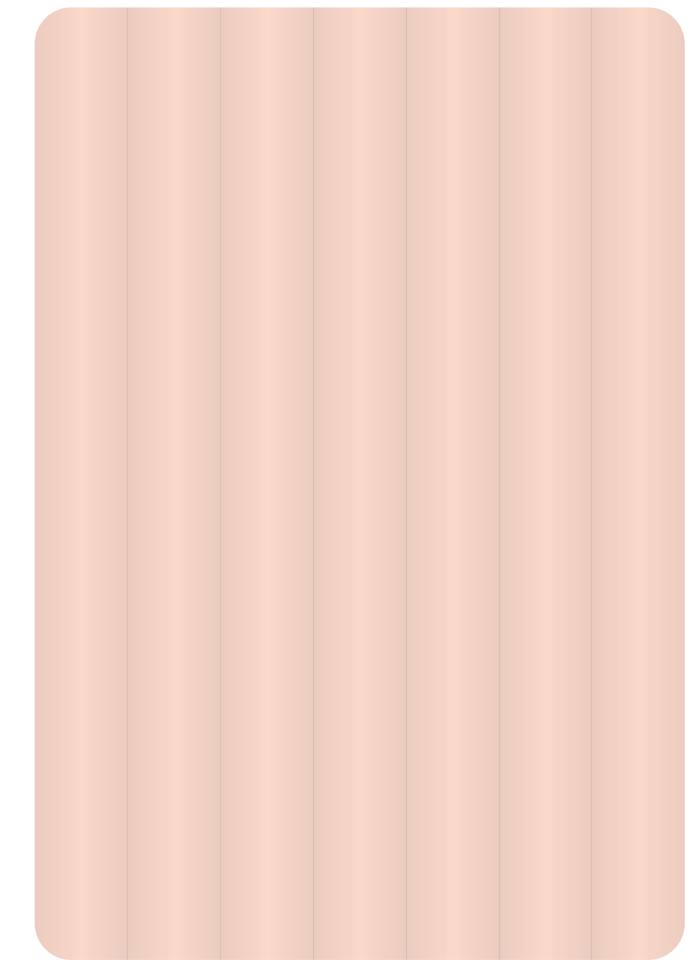

KR-1304 PR




**Pristine Pleats**  
2.5mm Thickness

**KORI™**  
Live your interior...




KR-1305 PR

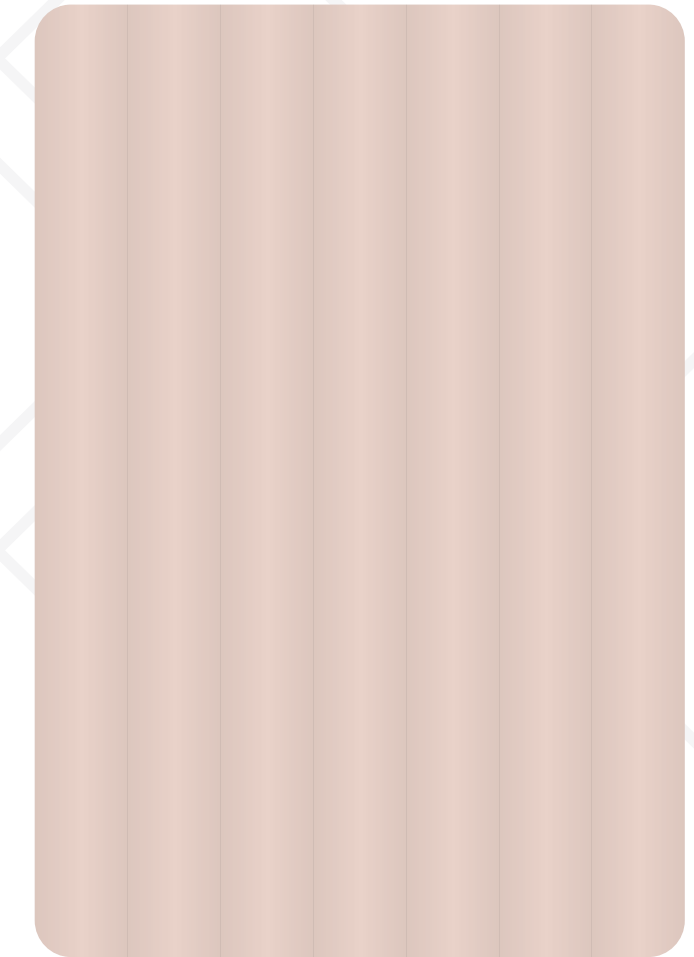

KR-1306 PR



KR-1308 PR

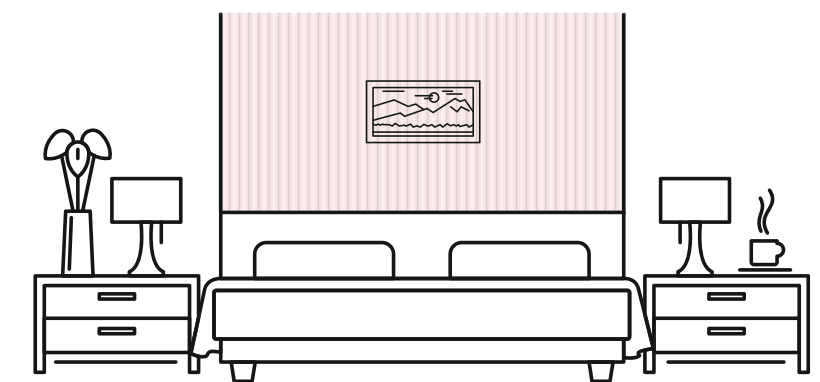

**Amazing Mystery of Shade**

Whenever in search of spatial balance, go for the shade that talks to your eyes first.



**Ballads of Beauty & Grace**

listen to the notes of simplicity style and splendor come together like a song.



 **Pristine Pleats**  
2.5mm Thickness

 **Translucent Textures**  
2.5mm Thickness



KR-1307 PR




KR-1208 PR



**Luxury Grooves**  
3.0mm Thickness

**KORI**  
Live your interior...

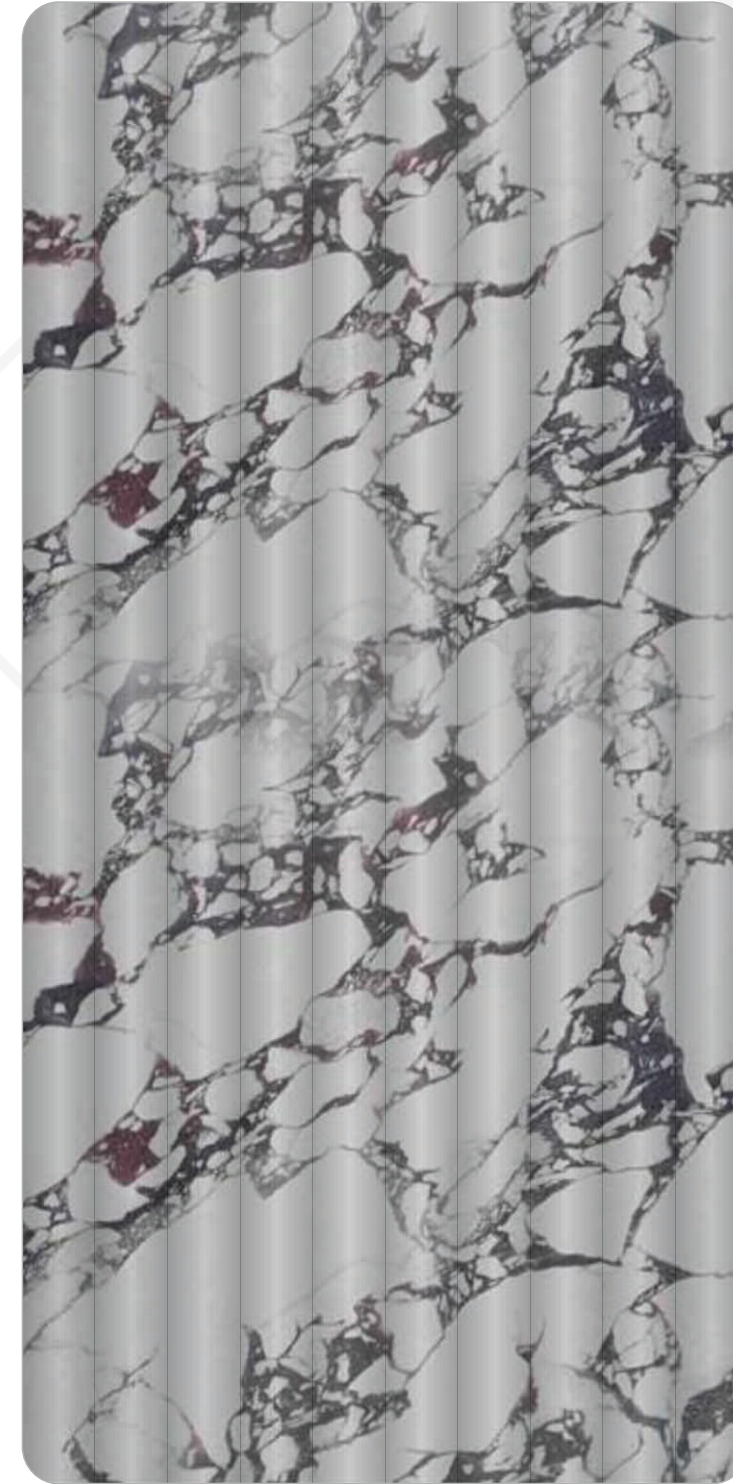

KR-1401 PR



KR-1402 PR




**Underline Your Presence**

let your space reflect  
who you are without much effort.



**Luxury Grooves**  
3.0mm Thickness

**KORI**  
Live your interior...

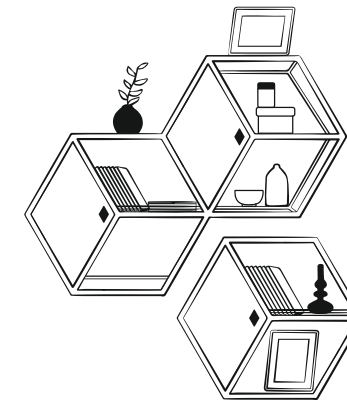

**Beauty Treatment For Space**

the aesthetic formula that cures any mundane space immediately.



KR-1403 PR





KR-1404 PR



**Luxury Grooves**  
3.0mm Thickness

**KORI**  
Live your interior...

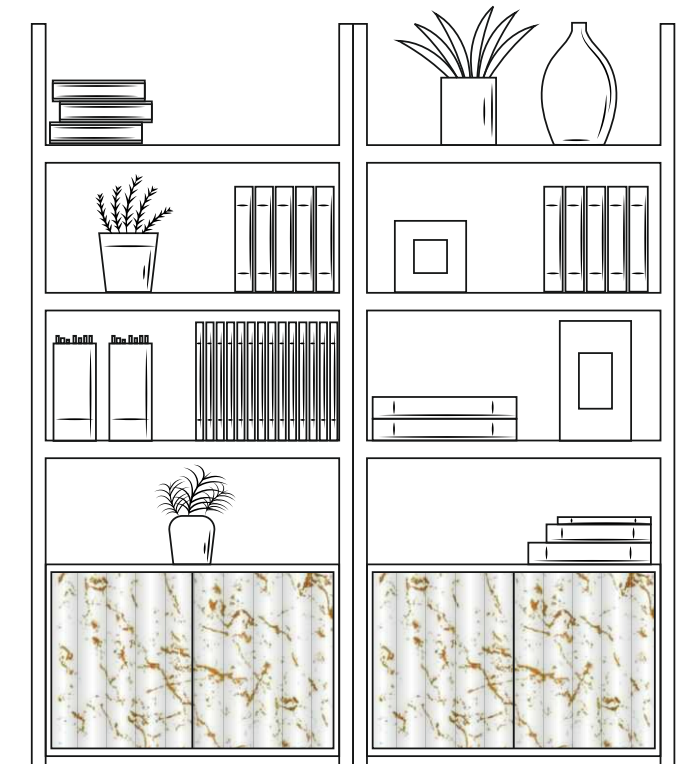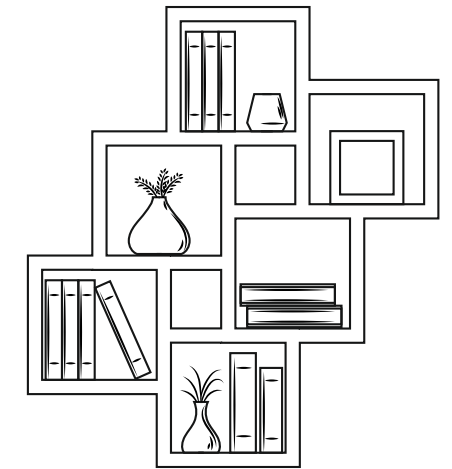

KR-1405 PR

**Surrender to the Superlative**

It's not what goes into the design,  
It's what comes out of it. feel it.

## TECHNICAL SPECIFICATION

Parameter	KORI FLUTED Acrylic Laminate	High Gloss Laminate Mica	PU Coating/ Duco Paint	Back Painted Glass
Gloss Level	< 90	< 70	< 85	< 85
Scratch Proof	Scratch resistance	No	No	No
Color Consistency	Excellent	Not Good	Not Good	Not Good
Orange Peel	No	Yes	Yes	No
UV Resistance	Excellent	Bad	Bad	Bad
Water Resistance	Excellent	Bad	Bad	Excellent
Dry Heat Resistance	Excellent	Good	Bad	Bad
Volatile Organic Compounds (VOCs)	No	Yes	Yes	Yes

## LIMITED WARRANTY

KORI Products are tested to be reasonably free of defects, and when used and fabricated properly they will comply with the applicable manufacturing specifications within realistic deviations. We recommend customers to inspect properly before installing.

KORI warranty in no way covers defects and non-compliance or otherwise attributable to any other causes, including without limitation the following:


- ❖ Improper handling/transportation/storage of KORl
- ❖ There will be no guarantee or exchange under any circumstances Improper installation of KORl
- ❖ Color variations in products from KORl batches are possible
- ❖ Improper or unintended usage of KORl
- ❖ We recommend using products from same batch to avoid color variations
- ❖ Lack of or improper maintenance of KORl
- ❖ This brochure is for presentation purpose only
- ❖ Exposure to high temperatures
- ❖ Unauthorized alteration to the products
- ❖ Outdoor applications
- ❖ Exposure to direct sunlight can gravely affect a laminate's appearance
- ❖ Use interior or sub-standard dipped plywood or dipped lipping patti, which may chemically react the adhesive.
- ❖ The use of synthetic rubber adhesives such as SR/Jat Pat, Bostic, Heatex, etc
- ❖ Prolonged exposure to high temperature (above 30°C-35°C)
- ❖ If hot cookware or utensils are directly placed on the laminate
- ❖ To avoid the inside cracks stretch line, do not store acrylic sheet in roll form

## HOW TO CARE

- ❖ Cleaning should be done with water and clean, non-abrasive cloth.
- ❖ Gloss surface are recommended only for vertical application.
- ❖ Outdoor application of the laminate with exposure to direct sunlight and conditions are not recommended.
- ❖ Do not place hot cookware directly on the laminate. Prolonged exposure to temperature above 30 degrees celsius May cause damage to the laminate surface.
- ❖ Do not use the laminate for purposes that it is not intended for (e.g. Do not iron chop, hammer or expose the laminate to open flame)
- ❖ Avoid the use of abrasive liquid cleanser's, bleaching compounds or solutions as These may damage the surface of the laminate.
- ❖ Outdoor application of the laminate with exposure to direct sunlight and conditions are not recommended. . Uv rays may be shaping the laminate.
- ❖ To remove more stubborn stain, use mild household cleansers like colin to gently Wipe down with a non-abrasive cloth.
- ❖ Peel off the protective film after processing.
- ❖ Have a thickness balance of +/- 0%.

## REASONS FOR AIR BUBBLE FORMATIONS ON ACRYLIC SHEETS

To avoid de lamination / air bubbles in between ply and laminate the above steps should be Taken care of. Bonding of acrylic sheets shouldn't be completed under high humidity.



Acrylic are bonded in extremely Humid conditions.



Debonding in certain areas because of uneven substrate surface.



Insufficient or lack of pressing during The period of laminate.



Use of extremely large acrylic/pvc Laminate sheets (more than 8 ft 2 ft long)



When substrate loses moisture After installation.



Use of synthetic resin Adhesive any other the peva (Polyethylene vinyl acetate co-polymer)

## Disclaimer

- ❖ Do not use plywood with high moisture content
- ❖ Do not use ply with uneven surface
- ❖ Apply sufficient pressure
- ❖ We do not recommend pasting of sheets on the printed/branding area of the plywood
- ❖ Avoid using inferior quality adhesive